



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-254T-2-BR-E-15
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	15.0	15.0
Speed, RPM	3540	2920
Voltage	460	380
# Phase	3	
Full Load Amps	17.6	-
Power Factor	0.88	-
Nominal Efficiency	91.0	88.0
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	F
FL Amps. @ 208 V	-	-
Locked Rotor Current	208.506	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	87.1	0.71
75%	89.66	0.81
100%	90.53	0.86
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	52.0	-
3D Image Link		
<a href="#">BR3-CI-TF-254T-2-BR-E-15</a>		

GENERAL DATA		
Frame Size	254T	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	56	
Tropicalization	true	
Cable Entry	1-NPT 1-1/4"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	254.678	
MECHANICAL DATA		
DE Bearing	6309C3	
NDE Bearing	6309C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavy washer)	DE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	75.0398	337.0
Pull-Up Torque	42.9753	193.0
Breakdown Torque	88.1773	396.0
Full Load Torque	22.267	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-254T-2-BR-E-15
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 15.0HP, 3540 RPM

Torque Speed (T-n) Curve

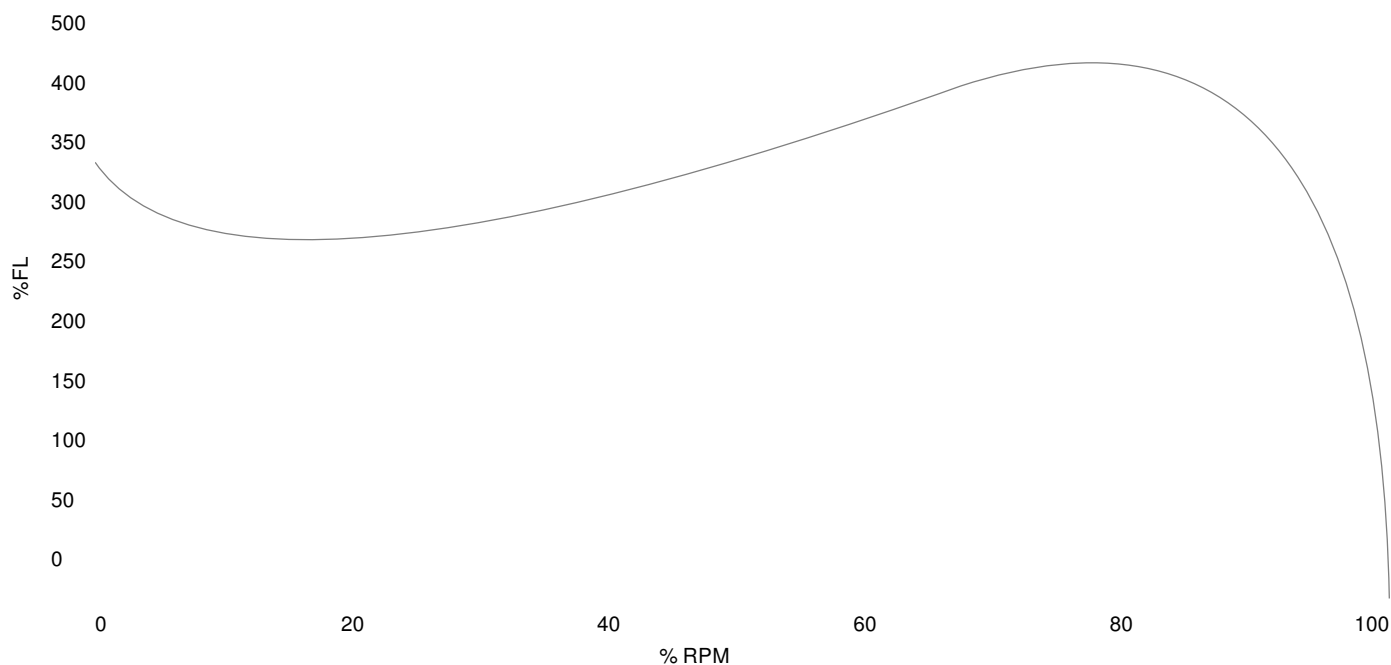

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	75.0398	337.0	Start Configuration
Pull-Up Torque	42.9753	193.0	Starting Current (A)
Breakdown Torque	88.1773	396.0	No-Load Current (A)
Full Load	22.267	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	8.01	-	-	-	-
25	3.75	9.11	3.58	3592.6	78.93	0.49
50	7.5	11.59	6.49	3585.6	87.1	0.71
75	11.25	14.7	9.45	3578.2	89.66	0.81
100	15.0	18.29	12.48	3570.4	90.53	0.86
125	18.75	22.21	15.58	3562.3	90.67	0.88

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com