






NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	BR3-CI-TF-444T-6-RR-E-100
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

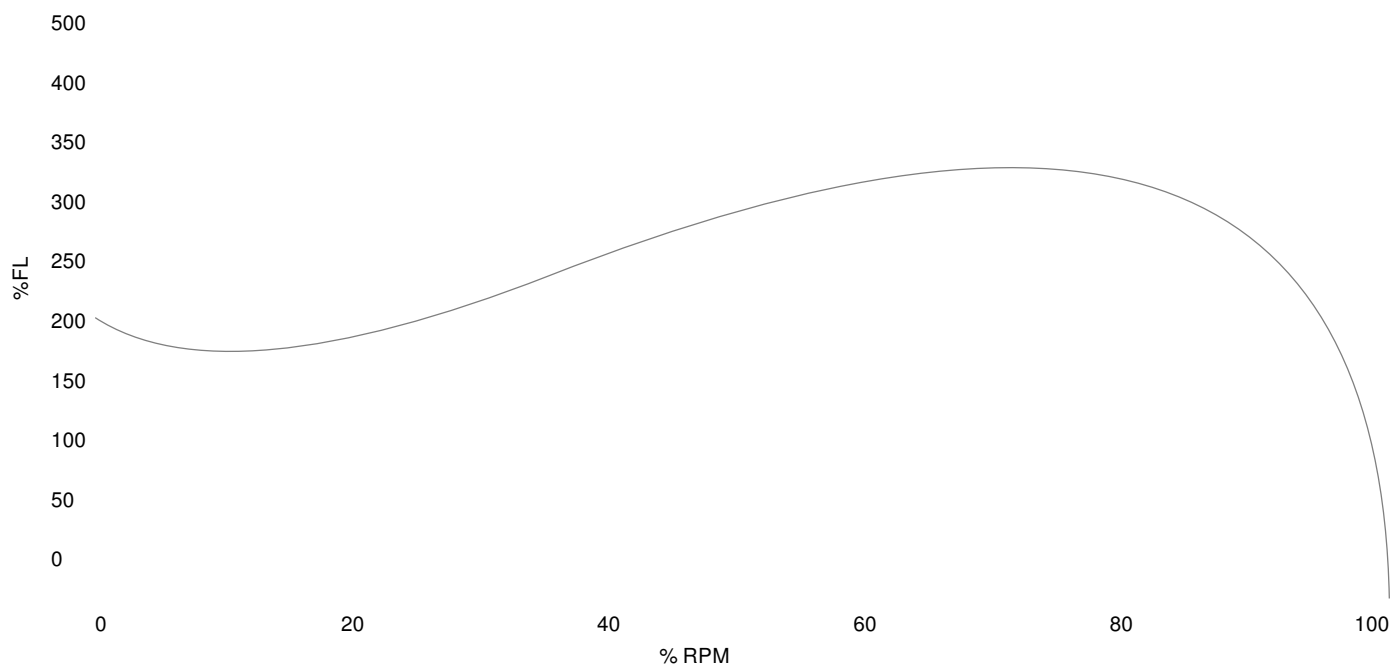

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	974.23	217.0	Start Configuration	-
Pull-Up Torque	682.41	152.0	Starting Current (A)	-
Breakdown Torque	1117.9	249.0	No-Load Current (A)	-
Full Load	448.954	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	33.69	-	-	-	-
25	25.0	42.21	20.42	1197.9	91.83	0.61
50	50.0	63.12	39.53	1195.9	94.86	0.79
75	75.0	86.98	58.9	1193.8	95.51	0.85
100	100.0	113.33	78.55	1191.3	95.48	0.87
125	125.0	130.16	90.49	1189.8	95.31	0.87

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com