

## Techtop Industries Nameplate and Performance Data

| NAMEPLATE DATA                             |            |        |
|--|------------|--------|
|  | 60 Hz.     | 50 Hz. |
| Horsepower                                 | 0.5        | 0.5    |
| Frame Size                                 | 56J        |        |
| Speed, RPM                                 | 1725       | -      |
| Voltage                                    | 3 Phase US |        |
| # Phase                                    | 3          |        |
| Full Load Amps                             | 2.08/1.04  | -      |
| Power Factor                               | 0.63       | -      |
| Nominal Efficiency                         | 70.6       | -      |
| 3/4 Load Efficiency                        | -          | -      |
| Service Factor                             | 1.15       | -      |
| Duty                                       | Cont. / S1 |        |
| FL Temp Rise °C                            | -          | -      |
| Enclosure                                  | TEFC       |        |
| Ambient Temp °C                            | 40         |        |
| KVA Code                                   | J          | -      |
| FL Amps. @ 208 V                           | 1.9        | -      |
| Insulation Class                           | F          |        |
| NEMA Design                                | B          |        |
| Weight                                     | 18.3       |        |
| DE Bearing                                 | 6204ZZ     |        |
| NDE Bearing                                | 6204ZZ     |        |
| dB No-Load                                 | -          |        |
| Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup> | -          |        |
| Start Capacitor                            | -          |        |
| Start Capacitor V                          | -          |        |
| Run Capacitor                              | -          |        |
| Run Capacitor V                            | -          |        |
| Number of Leads                            | 9          |        |
| Connection                                 | YY/Y       |        |
| Coil Resistance                            | -          |        |

|                     |                               |
|---------------------|-------------------------------|
| <b>Motor Model:</b> | <b>GA3-AL-TF-56J-4-B-D-.5</b> |
|---------------------|-------------------------------|

Performance Load Values:


| % Load | Horsepower | Current, Amps | Input power, Kilowatts | Speed, RPM | Efficiency | PF |
|--------|------------|---------------|------------------------|------------|------------|----|
| 0      | -          | -             | -                      | -          | -          | -  |
| 25     | -          | -             | -                      | -          | -          | -  |
| 50     | -          | -             | -                      | -          | -          | -  |
| 75     | -          | -             | -                      | -          | -          | -  |
| 100    | -          | -             | -                      | -          | -          | -  |
| 125    | -          | -             | -                      | -          | -          | -  |
| 150    | -          | -             | -                      | -          | -          | -  |
| SF     | -          | -             | -                      | -          | -          | -  |

|                     | Torque, Lb-Ft | % Full Load Torque | Speed, RPM | Current Amps. |
|---------------------|---------------|--------------------|------------|---------------|
| Locked Rotor Torque | -             | -                  | -          | -             |
| Pull Up Torque      | -             | -                  | -          | -             |
| Breakdown Torque    | -             | -                  | -          | -             |
| Full Load           | -             | -                  | -          | -             |

### Speed Torque Curve

Please contact Techtop for image.

### Dimensional Drawing

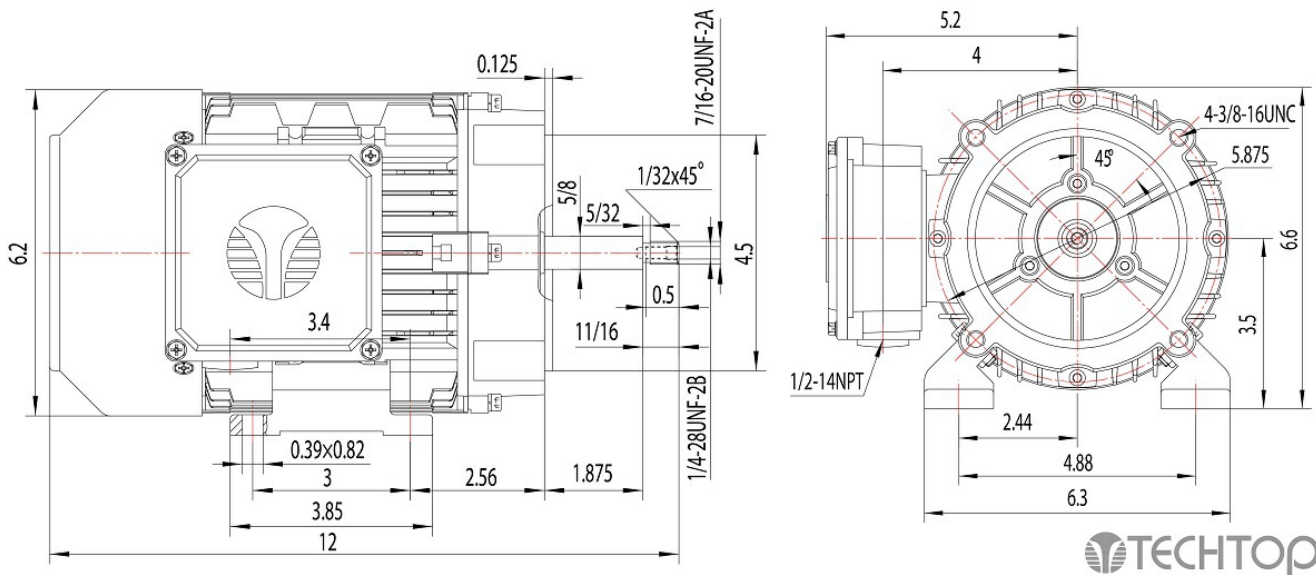

Dimensions are for reference only. Allowance should be made for minor deviations in non standard specified properties.

3D Image Link: Not available for this motor