

NEMA

MOTOR MODEL:	GR3-AL-TF-215JM-4-B-D-10
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA			
	60 Hz	50 Hz	
Horsepower	10.0	10.0	
Speed, RPM	1760	1455	
Voltage	230/460	190/380	
# Phase	3		
Full Load Amps	23.9/12.0	28.0/14.0	
Power Factor	0.86	-	
Nominal Efficiency	91.7	90.8	
3/4 Load Efficiency	-	-	
Service Factor	1.25	1.0	
KVA Code	L	J	
FL Amps. @ 208 V	26.3	-	
Locked Rotor Current	124.279	-	
Start Capacitor	-		
Start Capacitor V	-		
Run Capacitor	-		
Run Capacitor V	-		
Number of Leads	9		
Connection	YY/Y		
Coil Resistance	-		
Date Code	-		
	Load	Efficiency %	P.F.
	50%	-	-
	75%	-	-
	100%	-	-
FULL LOAD TEMPERATURE RISE			
FL Temp Rise °C	-	43.8	
3D Image Link			
Not available for this motor			

GENERAL DATA		
Frame Size	215JM	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Aluminum	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 1"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	131.0	
MECHANICAL DATA		
DE Bearing	6308ZZ	
NDE Bearing	6208ZZ	
dB No-Load	-	
Rotor Wk ² , Lb-Ft ²	-	
Comp Ring (wavey washer)	NDE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	82.5288	274.0
Pull-Up Torque	60.24	200.0
Breakdown Torque	115.36	383.0
Full Load Torque	30.12	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

*This report valid for above Date Code and newer models, please contact Techtop for more info.



Pump Motors


NEMA

MOTOR MODEL:	GR3-AL-TF-215JM-4-B-D-10
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC

Non Sinusoidal (VFD) Output 10.0HP, 1760 RPM

Torque Speed (T-n) Curve

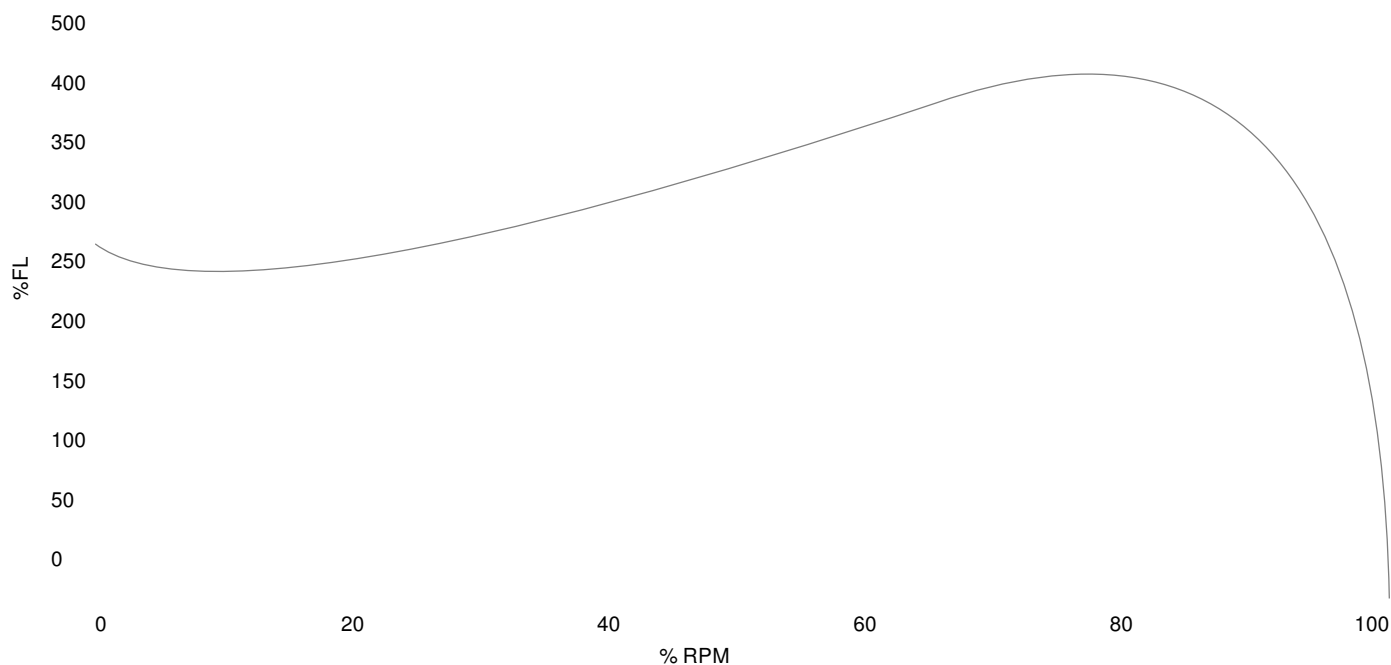

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	82.5288	274.0	Start Configuration
Pull-Up Torque	60.24	200.0	Starting Current (A)
Breakdown Torque	115.36	383.0	No-Load Current (A)
Full Load	30.12	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	2.5	-	-	-	-	-
50	5.0	-	-	-	-	-
75	7.5	-	-	-	-	-
100	10.0	-	-	-	-	-
125	12.5	-	-	-	-	-

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com