



NEMA Premium

# NEMA

<b>MOTOR MODEL:</b>	GR3-AL-TF-56C-2-B-D-.33
<b>FACTORY TYPE:</b>	TXA

## Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	0.33	0.33
Speed, RPM	3520	2900
Voltage	208-230/460	190/380
# Phase	3	
Full Load Amps	1.22-1.24/0.62	1.38/0.69
Power Factor	0.7	-
Nominal Efficiency	72.0	73.0
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	M	H
FL Amps. @ 208 V	1.22	-
Locked Rotor Current	4.5567	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Load	Efficiency %	P.F.
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	26.3	-
3D Image Link		
<a href="#">GR3-AL-TF-56C-2-B-D-.33</a>		

GENERAL DATA			
Frame Size	56C		
Frame Enclosure	TEFC		
Mounting	Rigid/C-Flange		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	B		
Frame Material	Cast Aluminum		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 1/2"		
Feet Removable	true		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	14.9		
MECHANICAL DATA			
DE Bearing	6204ZZ		
NDE Bearing	6204ZZ		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavy washer)	NDE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	1.70487	335.0	
Pull-Up Torque	1.40461	276.0	
Breakdown Torque	2.12219	417.0	
Full Load Torque	0.508918	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	GR3-AL-TF-56C-2-B-D-.33
<b>FACTORY TYPE:</b>	TXA

Premium NEMA Cast Aluminum, TEFC

Non Sinusoidal (VFD) Output 0.33HP, 3520 RPM

Torque Speed (T-n) Curve

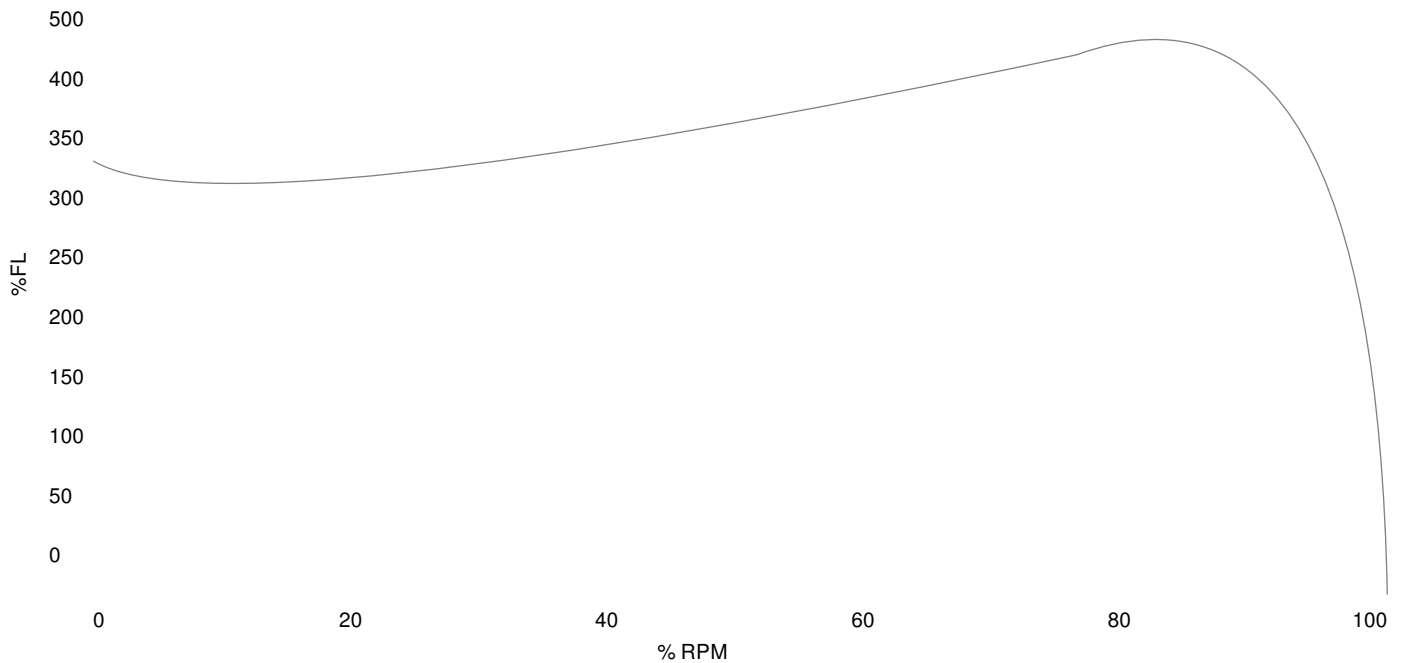

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	1.70487	335.0	Start Configuration	-
Pull-Up Torque	1.40461	276.0	Starting Current (A)	-
Breakdown Torque	2.12219	417.0	No-Load Current (A)	-
Full Load	0.508918	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	0.49	-	-	-	-
25	0.0825	-	-	-	-	-
50	0.165	-	-	-	-	-
75	0.2475	-	-	-	-	-
100	0.33	-	-	-	-	-
125	0.4125	-	-	-	-	-

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com