



NEMA Premium

**NEMA**

|                      |                         |
|----------------------|-------------------------|
| <b>MOTOR MODEL:</b>  | GR3-AL-TF-56C-2-B-F-.75 |
| <b>FACTORY TYPE:</b> | TXA                     |

Premium NEMA Cast Aluminum, TEFC

| ELECTRICAL DATA                         |              |       |
|---|--------------|-------|
|   | 60 Hz        | 50 Hz |
| Horsepower                              | 0.75         | 0.75  |
| Speed, RPM                              | 3500         | -     |
| Voltage                                 | 575          | -     |
| # Phase                                 | 3            |       |
| Full Load Amps                          | 0.96         | -     |
| Power Factor                            | 0.75         | -     |
| Nominal Efficiency                      | 77.0         | -     |
| 3/4 Load Efficiency                     | -            | -     |
| Service Factor                          | 1.25         | -     |
| KVA Code                                | L            | -     |
| FL Amps. @ 208 V                        | -            | -     |
| LRC @ 60Hz HV                           | -            | -     |
| Start Capacitor                         | -            |       |
| Start Capacitor V                       | -            |       |
| Run Capacitor                           | -            |       |
| Run Capacitor V                         | -            |       |
| Number of Leads                         | 3            |       |
| Connection                              | Y            |       |
| Coil Resistance                         | -            |       |
| Date Code                               | -            |       |
|   |              |       |
| Load                                    | Efficiency % | P.F.  |
| 50%                                     | -            | -     |
| 75%                                     | -            | -     |
| 100%                                    | -            | -     |
|   |              |       |
| FULL LOAD TEMPERATURE RISE              |              |       |
| FL Temp Rise °C                         | 40.4         | -     |
|   |              |       |
| 3D Image Link                           |              |       |
| <a href="#">GR3-AL-TF-56C-2-B-F-.75</a> |              |       |

| GENERAL DATA                               |                |       |
|--|----------------|-------|
| Frame Size                                 | 56C            |       |
| Frame Enclosure                            | TEFC           |       |
| Mounting                                   | Rigid/C-Flange |       |
| Insulation Class                           | F              |       |
| Duty                                       | Cont. / S1     |       |
| NEMA Design                                | B              |       |
| Frame Material                             | Cast Aluminum  |       |
| Ingress Protection                         | 55             |       |
| Tropicalization                            | true           |       |
| Cable Entry                                | 1-NPT 1/2"     |       |
| Feet Removable                             | true           |       |
| Double Drilled                             | -              |       |
| Paint Color                                | Graphite Gray  |       |
| Paint RAL                                  | 7024           |       |
| Weight lb                                  | 17.1           |       |
|  |                |       |
| MECHANICAL DATA                            |                |       |
| DE Bearing                                 | 6204ZZ         |       |
| NDE Bearing                                | 6204ZZ         |       |
| dB No-Load                                 | -              |       |
| Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup> | -              |       |
| Comp Ring (wavey washer)                   | NDE            |       |
|  |                |       |
| TORQUE VALUES                              | Torque lb-ft   | % FLT |
| Locked Rotor Torque                        | -              | -     |
| Pull-Up Torque                             | -              | -     |
| Breakdown Torque                           | -              | -     |
| Full Load Torque                           | -              | -     |
|  |                |       |
| SITE CONDITIONS                            |                |       |
| Ambient Temp °C                            | 40             |       |
| Altitude Above Sea Level m                 | 1000           |       |

\*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com




NEMA Premium

|                      |                         |
|----------------------|-------------------------|
| <b>MOTOR MODEL:</b>  | GR3-AL-TF-56C-2-B-F-.75 |
| <b>FACTORY TYPE:</b> | TXA                     |

**NEMA**

Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

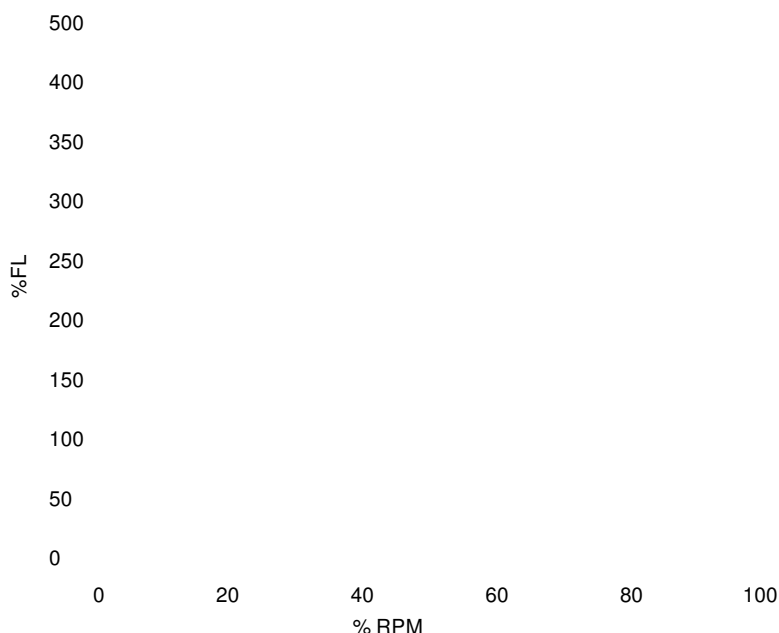

Performance Load Values, High Voltage, 60Hz

| Torque Values       | Torque lb-ft | % FLT | Performance Values   |
|---------------------|--------------|-------|----------------------|
| Locked Rotor Torque | -            | -     | Start Configuration  |
| Pull-Up Torque      | -            | -     | Starting Current (A) |
| Breakdown Torque    | -            | -     | No-Load Current (A)  |
| Full Load           | -            | -     | No-Load Power Factor |

| % Load | Horsepower | Current, Amps | Input power, Kilowatts | Speed, RPM | Efficiency | PF |
|--------|------------|---------------|------------------------|------------|------------|----|
| 0      | -          | -             | -                      | -          | -          | -  |
| 25     | -          | -             | -                      | -          | -          | -  |
| 50     | -          | -             | -                      | -          | -          | -  |
| 75     | -          | -             | -                      | -          | -          | -  |
| 100    | -          | -             | -                      | -          | -          | -  |
| 125    | -          | -             | -                      | -          | -          | -  |