



IE3

IEC

<b>MOTOR MODEL:</b>	GR3-AL-TF-90LB35-4-B-D-2
<b>FACTORY TYPE:</b>	TAX

### IE3 IEC Cast Aluminum, TEFC

<b>ELECTRICAL DATA</b>		
	60 Hz	50 Hz
Horsepower	2.0	2.0
Speed, RPM	1740	1425
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	5.58/2.79	6.64/3.32
Power Factor	0.78	-
Nominal Efficiency	86.5	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	K	J
FL Amps. @ 208 V	5.95	-
LRC @ 60Hz HV	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Date Code	-	
<b>Load</b>	<b>Efficiency %</b>	<b>P.F.</b>
50%	-	-
75%	-	-
100%	-	-
<b>FULL LOAD TEMPERATURE RISE</b>		
FL Temp Rise °C	-	-
<b>3D Image Link</b>		
Not available for this motor		

<b>GENERAL DATA</b>				
Frame Size	90LB35			
Frame Enclosure	TEFC			
Mounting	B35			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	-			
Frame Material	Cast Aluminum			
Ingress Protection	55			
Tropicalization	true			
Cable Entry	1-M20X1.5			
Feet Removable	true			
Double Drilled	-			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	40.0			
<b>MECHANICAL DATA</b>				
DE Bearing	6205ZZ			
NDE Bearing	6205ZZ			
dB No-Load	-			
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-			
Comp Ring (wavey washer)	-			
<b>TORQUE VALUES</b>			<b>Torque lb-ft</b>	<b>% FLT</b>
Locked Rotor Torque	-	-		
Pull-Up Torque	-	-		
Breakdown Torque	-	-		
Full Load Torque	-	-		
<b>SITE CONDITIONS</b>				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

\*This report valid for above Date Code and newer models, please contact Techtop for more info.




IE3

IEC

<b>MOTOR MODEL:</b>	GR3-AL-TF-90LB35-4-B-D-2
<b>FACTORY TYPE:</b>	TAX

IE3 IEC Cast Aluminum, TEFC

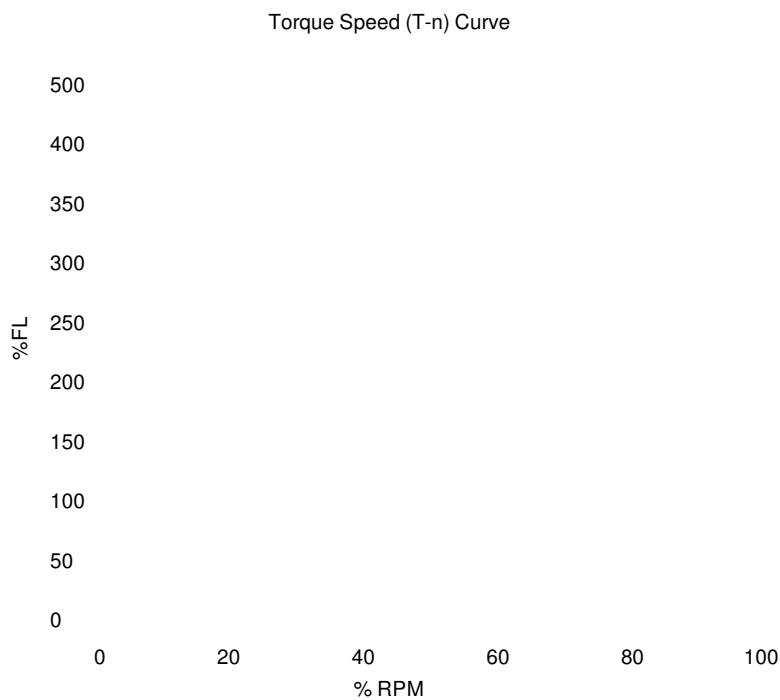

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	-	-	Start Configuration
Pull-Up Torque	-	-	Starting Current (A)
Breakdown Torque	-	-	No-Load Current (A)
Full Load	-	-	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	-	-	-	-	-	-
50	-	-	-	-	-	-
75	-	-	-	-	-	-
100	-	-	-	-	-	-
125	-	-	-	-	-	-