



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-145T-4-B-D-2
<b>FACTORY TYPE:</b>	TXC

## Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	2.0	2.0
Speed, RPM	1730	1425
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	5.55/2.78	7.4/3.7
Power Factor	0.75	-
Nominal Efficiency	86.5	82.0
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	K	J
FL Amps. @ 208 V	6.1381	-
Locked Rotor Current	43.4988	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	-	-
3D Image Link		
<a href="#">GR3-CI-TF-145T-4-B-D-2</a>		

GENERAL DATA				
Frame Size	145T			
Frame Enclosure	TEFC			
Mounting	Rigid			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	A			
Frame Material	Cast Iron			
Ingress Protection	55			
Tropicalization	true			
Cable Entry	1-NPT 3/4"			
Feet Removable	true			
Double Drilled	-			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	59.535			
MECHANICAL DATA				
DE Bearing	6205ZZ			
NDE Bearing	6205ZZ			
dB No-Load	-			
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-			
Comp Ring (wavy washer)	NDE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	18.3478		303.0	
Pull-Up Torque	12.898		213.0	
Breakdown Torque	19.68		325.0	
Full Load Torque	6.05539		100.0	
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: [info@techttopind.com](mailto:info@techttopind.com)



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-145T-4-B-D-2
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 2.0HP, 1730 RPM

Torque Speed (T-n) Curve

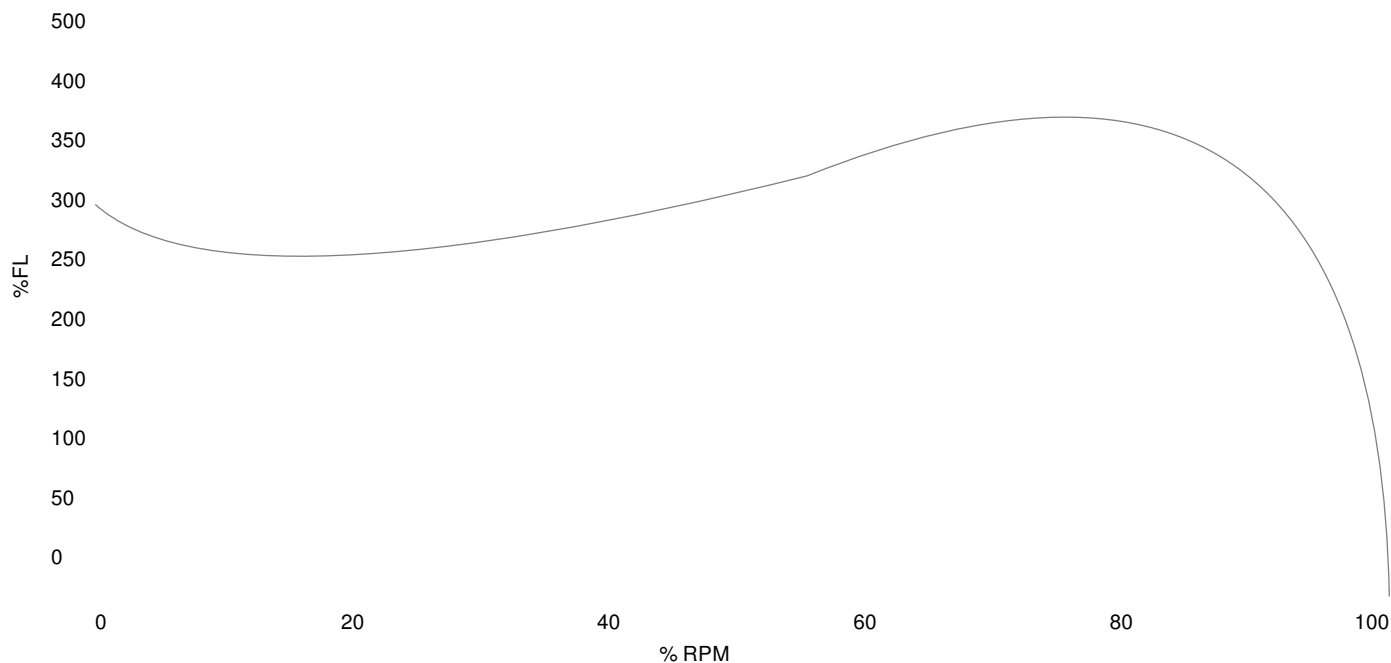

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	18.3478	303.0	Start Configuration
Pull-Up Torque	12.898	213.0	Starting Current (A)
Breakdown Torque	19.68	325.0	No-Load Current (A)
Full Load	6.05539	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	0.5	-	-	-	-	-
50	1.0	-	-	-	-	-
75	1.5	-	-	-	-	-
100	2.0	-	-	-	-	-
125	2.5	-	-	-	-	-

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com