

Techtop Industries Nameplate and Performance Data

| NAMEPLATE DATA | | |
|--|------------|---------|
| | 60 Hz | 50 Hz |
| Horsepower | 2.0 | 2.0 |
| Frame Size | 145TC | |
| Speed, RPM | 1730 | 1425 |
| Voltage | 230/460 | 190/380 |
| # Phase | 3 | |
| Full Load Amps | 5.55/2.78 | 7.4/3.7 |
| Power Factor | 0.75 | - |
| Nominal Efficiency | 86.5 | 82.0 |
| 3/4 Load Efficiency | - | - |
| Service Factor | 1.25 | 1.0 |
| Duty | Cont. / S1 | |
| FL Temp Rise °C | - | - |
| Enclosure | TEFC | |
| Ambient Temp °C | 40 | |
| KVA Code | K | J |
| FL Amps. @ 208 V | 6.1381 | - |
| Insulation Class | F | |
| NEMA Design | A | |
| Weight | 59.535 | |
| DE Bearing | 6205ZZ | |
| NDE Bearing | 6205ZZ | |
| dB No-Load | - | |
| Rotor Wk ² , Lb-Ft ² | - | |
| Start Capacitor | - | |
| Start Capacitor V | - | |
| Run Capacitor | - | |
| Run Capacitor V | - | |
| Number of Leads | 9 | |
| Connection | YY/Y | |
| Coil Resistance | - | |

| | |
|---------------------|--------------------------------|
| Motor Model: | GR3-CI-TF-145TC-4-B-D-2 |
|---------------------|--------------------------------|

Performance Load Values:




| % Load | Horsepower | Current, Amps | Input power, Kilowatts | Speed, RPM | Efficiency | PF |
|--------|------------|---------------|------------------------|------------|------------|----|
| 0 | - | - | - | - | - | - |
| 25 | 0.5 | - | - | - | - | - |
| 50 | 1.0 | - | - | - | - | - |
| 75 | 1.5 | - | - | - | - | - |
| 100 | 2.0 | - | - | - | - | - |
| 125 | 2.5 | - | - | - | - | - |
| 150 | 3.0 | - | - | - | - | - |
| SF | - | - | - | - | - | - |

| | Torque, Lb-Ft | % Full Load Torque | Speed, RPM | Current Amps. |
|---------------------|---------------|--------------------|------------|---------------|
| Locked Rotor Torque | - | - | - | - |
| Pull Up Torque | - | - | - | - |
| Breakdown Torque | - | - | - | - |
| Full Load | - | - | - | - |

Speed Torque Curve

Please contact Techtop for image.

Dimensional Drawing

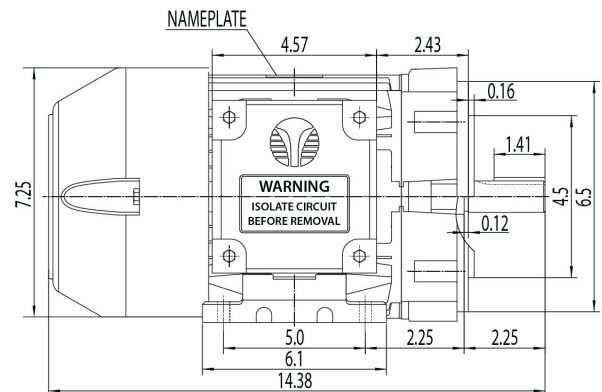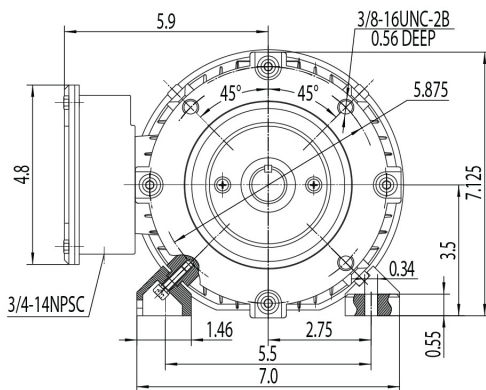

Dimensions are for reference only. Allowance should be made for minor deviations in non standard specified properties.

3D Image Link: Not available for this motor