



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-213T-2-B-F-7.5
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	7.5	7.5
Speed, RPM	3520	-
Voltage	575	-
# Phase	3	
Full Load Amps	6.897745891	-
Power Factor	0.88	-
Nominal Efficiency	89.5	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	J	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	3	
Connection	Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	88.01	0.79
75%	90.04	0.86
100%	90.54	0.89
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	-	-
3D Image Link		
<a href="#">GR3-CI-TF-213T-2-B-F-7.5</a>		

GENERAL DATA		
Frame Size	213T	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 1"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	140.018	
MECHANICAL DATA		
DE Bearing	6308ZZ	
NDE Bearing	6308ZZ	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavey washer)	NDE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	38.6162	354.0
Pull-Up Torque	11.5631	106.0
Breakdown Torque	45.925	421.0
Full Load Torque	10.9085	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techttop for more info.



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-213T-2-B-F-7.5
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 7.5HP, 3520 RPM

Torque Speed (T-n) Curve

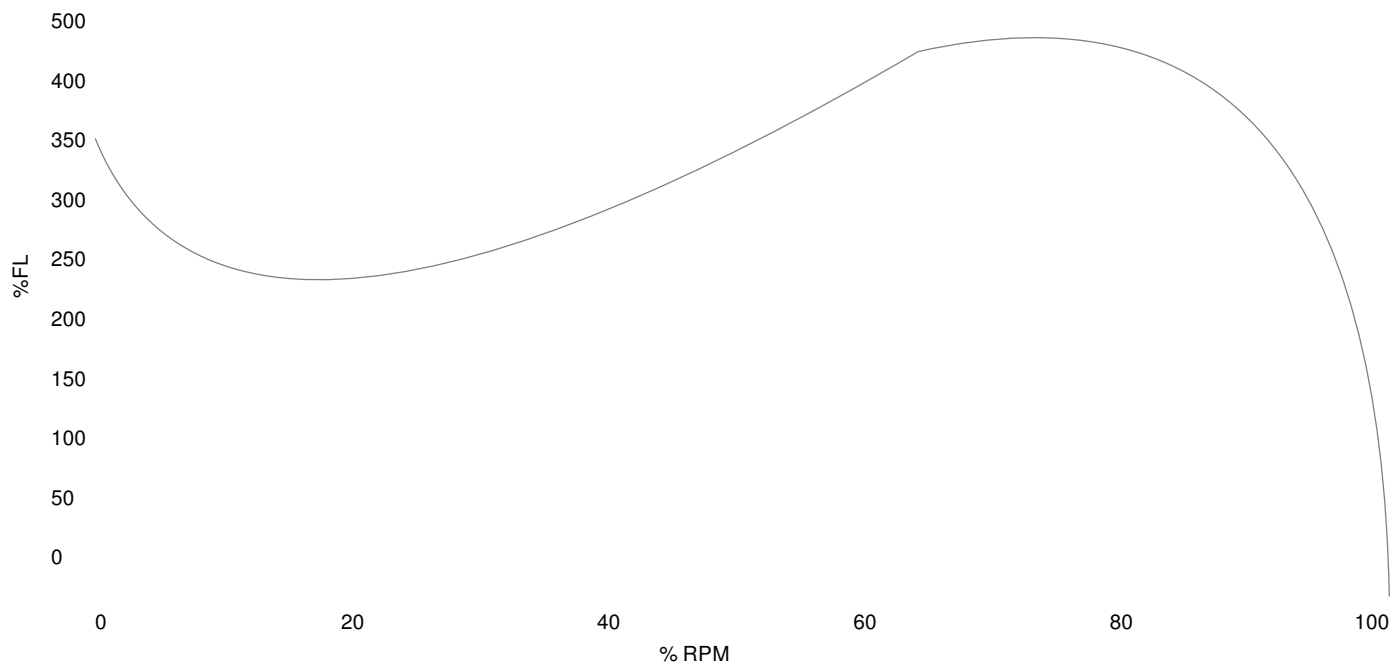

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	38.6162	354.0	Start Configuration
Pull-Up Torque	11.5631	106.0	Starting Current (A)
Breakdown Torque	45.925	421.0	No-Load Current (A)
Full Load	10.9085	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	5.78	-	-	-	-
25	1.875	7.16	1700.8	3584.8	80.84	0.6
50	3.75	9.98	3124.7	3571.1	88.01	0.79
75	5.625	13.32	4581.2	3556.7	90.04	0.86
100	7.5	17.04	6074.7	3541.5	90.54	0.89
125	9.375	21.03	7608.1	3525.5	90.36	0.91

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com