



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-213T-2-B-F-7.5
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	7.5	7.5
Speed, RPM	3520	-
Voltage	575	-
# Phase	3	
Full Load Amps	6.897745891	-
Power Factor	0.88	-
Nominal Efficiency	89.5	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	J	-
FL Amps. @ 208 V	-	-
LRC @ 60Hz HV	150.77	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	3	
Connection	Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	88.01	0.79
75%	90.04	0.86
100%	90.54	0.89
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	-	-
3D Image Link		
<a href="#">GR3-CI-TF-213T-2-B-F-7.5</a>		

GENERAL DATA			
Frame Size	213T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 1"		
Feet Removable	true		
Double Drilled	-		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	140.018		
MECHANICAL DATA			
DE Bearing	6308ZZ		
NDE Bearing	6308ZZ		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavy washer)	NDE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	38.6162	354.0	
Pull-Up Torque	11.5631	106.0	
Breakdown Torque	45.925	421.0	
Full Load Torque	10.9085	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: info@techttopind.com




NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-213T-2-B-F-7.5
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

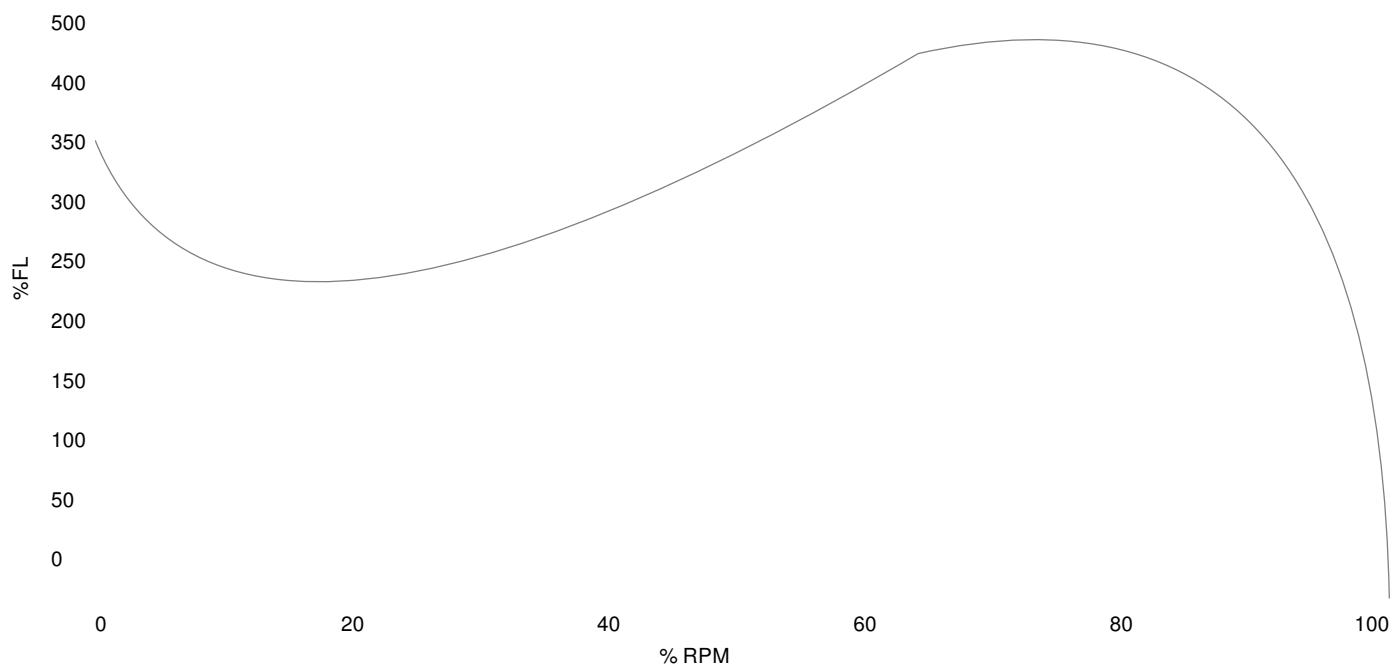

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	38.6162	354.0	Start Configuration
Pull-Up Torque	11.5631	106.0	Starting Current (A)
Breakdown Torque	45.925	421.0	No-Load Current (A)
Full Load	10.9085	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	5.78	-	-	-	-
25	1.875	7.16	1700.8	3584.8	80.84	0.6
50	3.75	9.98	3124.7	3571.1	88.01	0.79
75	5.625	13.32	4581.2	3556.7	90.04	0.86
100	7.5	17.04	6074.7	3541.5	90.54	0.89
125	9.375	21.03	7608.1	3525.5	90.36	0.91

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com