



NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-256T-6-BR-F-10
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	10.0	10.0
Speed, RPM	1170	-
Voltage	575	-
# Phase	3	
Full Load Amps	10.69001311	-
Power Factor	0.76	-
Nominal Efficiency	91.0	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	J	-
FL Amps. @ 208 V	-	-
LRC @ 60Hz HV	96.8371	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	89.88	0.55
75%	90.84	0.67
100%	90.57	0.74
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	45.0	-
3D Image Link		
GR3-CI-TF-256T-6-BR-F-10		

GENERAL DATA		
Frame Size	256T	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 1-1/4"	
Feet Removable	true	
Double Drilled	true	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	277.83	
MECHANICAL DATA		
DE Bearing	6309C3	
NDE Bearing	6309C3	
dB No-Load	-	
Rotor Wk ² , Lb-Ft ²	-	
Comp Ring (wavy washer)	DE	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	124.258	277.0
Pull-Up Torque	51.1387	114.0
Breakdown Torque	145.342	324.0
Full Load Torque	44.8585	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

*This report valid for above Date Code and newer models, please contact Techttop for more info.




NEMA Premium

MOTOR MODEL:	GR3-CI-TF-256T-6-BR-F-10
FACTORY TYPE:	TXC

NEMA

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

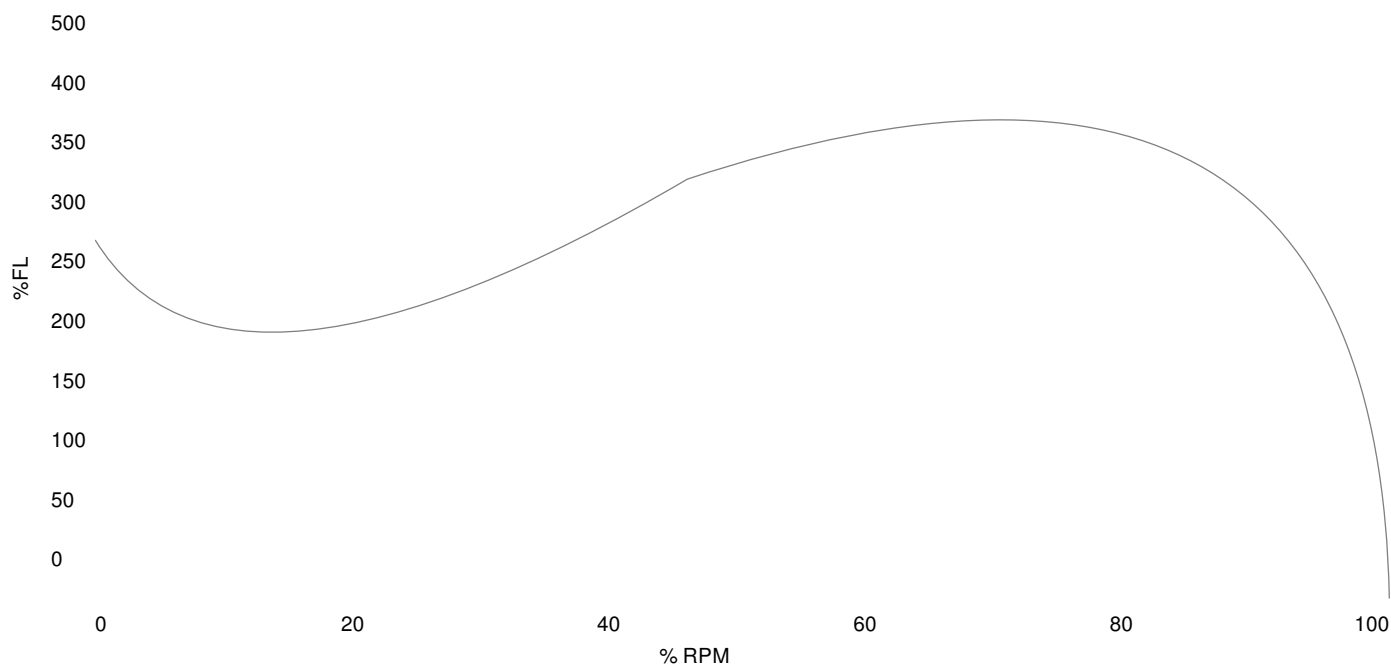

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	124.258	277.0	Start Configuration	-
Pull-Up Torque	51.1387	114.0	Starting Current (A)	-
Breakdown Torque	145.342	324.0	No-Load Current (A)	-
Full Load	44.8585	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	7.69	-	-	-	-
25	2.5	8.18	2.21	1195.4	84.71	0.34
50	5.0	9.57	4.17	1191.0	89.88	0.55
75	7.5	11.55	6.19	1186.1	90.84	0.67
100	10.0	14.01	8.28	1180.8	90.57	0.74
125	12.5	16.84	10.45	1175.1	89.75	0.78

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com