



NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-324TS-2-BR-D-40
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	40.0	40.0
Speed, RPM	3560	2940
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	90.07/45.04	112/56
Power Factor	0.89	-
Nominal Efficiency	92.4	90.0
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	H	F
FL Amps. @ 208 V	99.6002	-
LRC @ 60Hz HV	344.434	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	90.37	0.82
75%	91.99	0.88
100%	92.34	0.9
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	67.0	-
3D Image Link		
GR3-CI-TF-324TS-2-BR-D-40		

GENERAL DATA				
Frame Size	324TS			
Frame Enclosure	TEFC			
Mounting	Rigid			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	A			
Frame Material	Cast Iron			
Ingress Protection	55			
Tropicalization	true			
Cable Entry	1-NPT 2"			
Feet Removable	true			
Double Drilled	-			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	485.1			
MECHANICAL DATA				
DE Bearing	6312C3			
NDE Bearing	6312C3			
dB No-Load	-			
Rotor Wk ² , Lb-Ft ²	-			
Comp Ring (wavey washer)	DE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	140.239	235.0		
Pull-Up Torque	74.5952	125.0		
Breakdown Torque	140.836	236.0		
Full Load Torque	59.6762	100.0		
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com




NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-324TS-2-BR-D-40
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

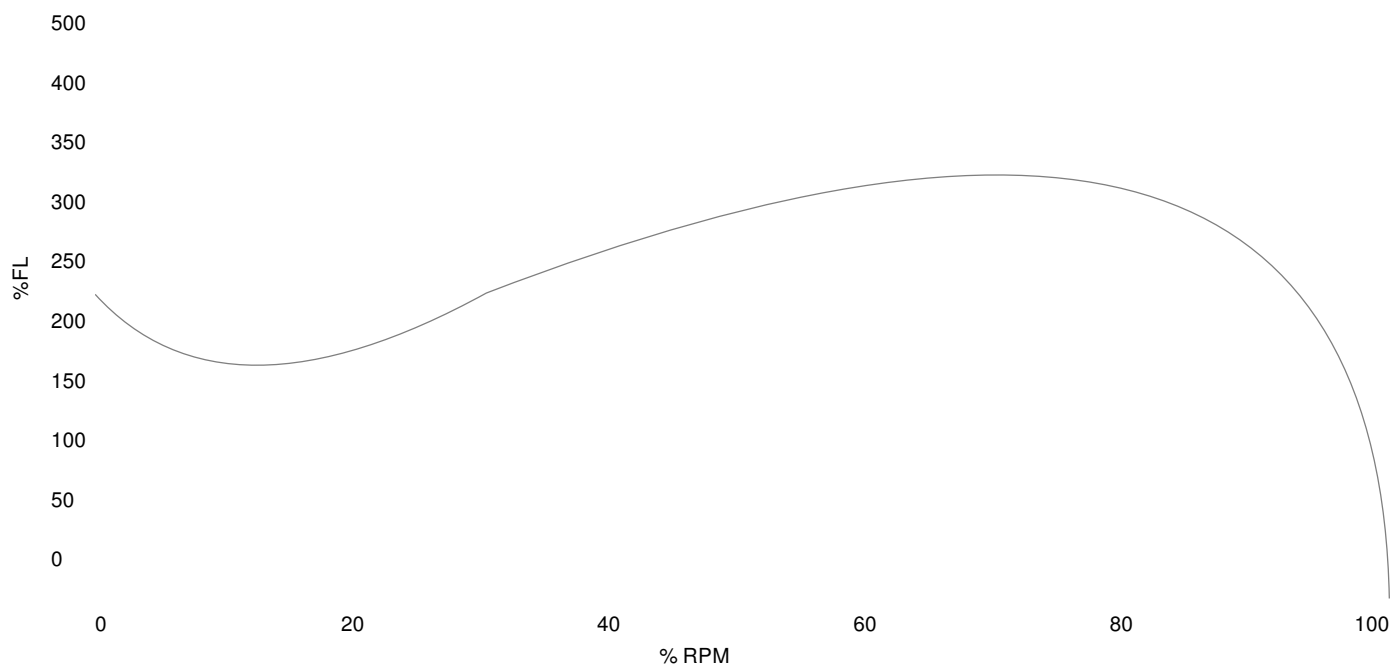

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	140.239	235.0	Start Configuration
Pull-Up Torque	74.5952	125.0	Starting Current (A)
Breakdown Torque	140.836	236.0	No-Load Current (A)
Full Load	59.6762	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	12.48	-	-	-	-
25	10.0	16.87	8.88	3588.8	84.46	0.66
50	20.0	25.43	16.6	3578.7	90.37	0.82
75	30.0	35.03	24.46	3567.6	91.99	0.88
100	40.0	45.56	32.49	3555.4	92.34	0.9
125	50.0	56.88	40.71	3542.2	92.13	0.9

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com