



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-326TS-2-BR-D-50
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	50.0	50.0
Speed, RPM	3560	2940
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	113.12/56.56	141/70.5
Power Factor	0.9	-
Nominal Efficiency	93.0	91.2
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	H	F
FL Amps. @ 208 V	125.087	-
LRC @ 60Hz HV	467.239	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	92.58	0.81
75%	93.66	0.88
100%	93.76	0.9
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	63.0	-
3D Image Link		
<a href="#">GR3-CI-TF-326TS-2-BR-D-50</a>		

GENERAL DATA			
Frame Size	326TS		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 2"		
Feet Removable	true		
Double Drilled	true		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	529.2		
MECHANICAL DATA			
DE Bearing	6312C3		
NDE Bearing	6312C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavy washer)	DE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque		227.048	306.0
Pull-Up Torque		128.364	173.0
Breakdown Torque		225.564	304.0
Full Load Torque		74.1988	100.0
SITE CONDITIONS			
Ambient Temp °C		40	
Altitude Above Sea Level m		1000	

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com




NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-326TS-2-BR-D-50
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

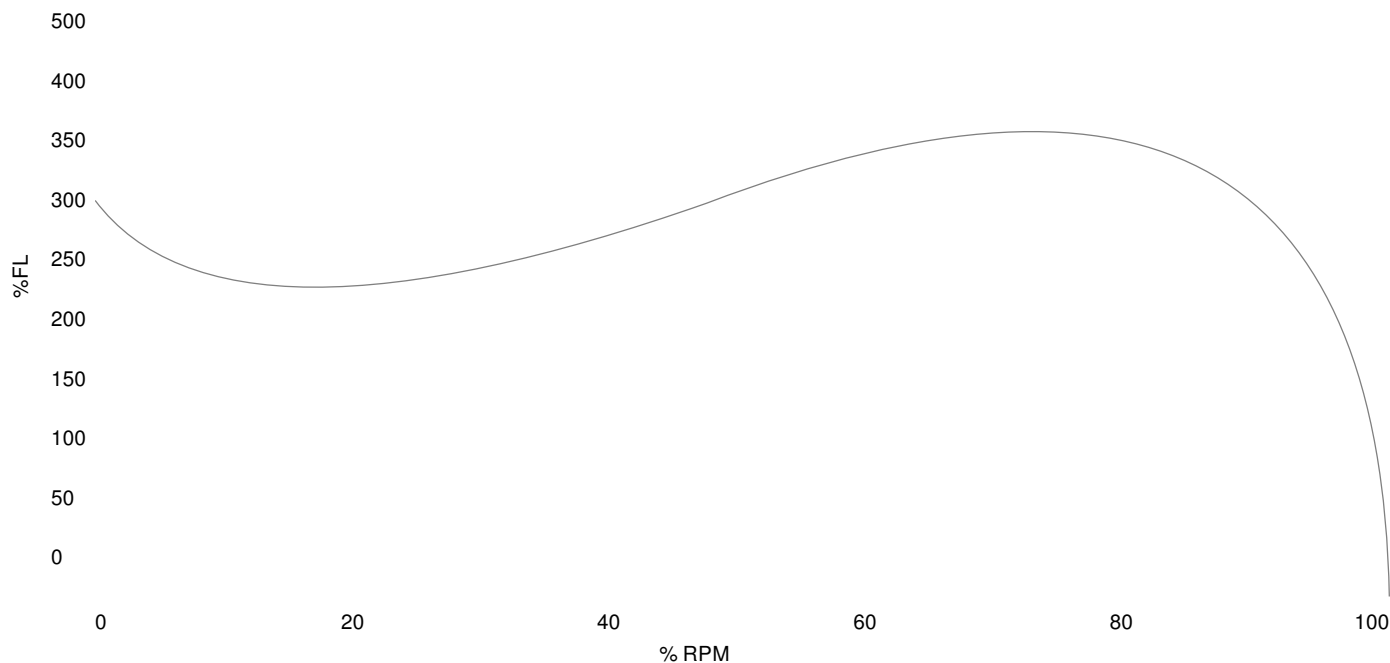

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	227.048	306.0	Start Configuration
Pull-Up Torque	128.364	173.0	Starting Current (A)
Breakdown Torque	225.564	304.0	No-Load Current (A)
Full Load	74.1988	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	15.79	-	-	-	-
25	12.5	20.77	10.58	3591.0	88.13	0.64
50	25.0	31.09	20.14	3582.2	92.58	0.81
75	37.5	42.8	29.87	3572.7	93.66	0.88
100	50.0	55.69	39.78	3562.4	93.76	0.9
125	62.5	69.53	49.9	3551.4	93.44	0.9

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com