

Techtop Industries Nameplate and Performance Data

| NAMEPLATE DATA | | |
|--|-------------|----------|
| | 60 Hz. | 50 Hz. |
| Horsepower | 40.0 | 40.0 |
| Frame Size | 364T | |
| Speed, RPM | 1180 | 980 |
| Voltage | 3 Phase US | 190/380 |
| # Phase | 3 | |
| Full Load Amps | 93.65/46.82 | 113/56.5 |
| Power Factor | 0.84 | - |
| Nominal Efficiency | 94.1 | 92.5 |
| 3/4 Load Efficiency | - | - |
| Service Factor | 1.15 | 1.0 |
| Duty | Cont. / S1 | |
| FL Temp Rise °C | - | - |
| Enclosure | TEFC | |
| Ambient Temp °C | 40 | |
| KVA Code | J | E |
| FL Amps. @ 208 V | 103.554 | - |
| Insulation Class | F | |
| NEMA Design | A | |
| Weight | 725.445 | |
| DE Bearing | 6313C3 | |
| NDE Bearing | 6313C3 | |
| dB No-Load | - | |
| Rotor Wk ² , Lb-Ft ² | - | |
| Start Capacitor | | |
| Start Capacitor V | - | |
| Run Capacitor | | |
| Run Capacitor V | - | |
| Number of Leads | 12 | |
| Connection | ??/? | |
| Coil Resistance | 0.31236 | |

| | |
|---------------------|---------------------------------|
| Motor Model: | GR3-CI-TF-364T-6-BR-D-40 |
|---------------------|---------------------------------|

Performance Load Values:


| % Load | Horsepower | Current, Amps | Input power, Kilowatts | Speed, RPM | Efficiency | PF |
|--------|------------|---------------|------------------------|------------|------------|----|
| 0 | 20.0 | 16.39 | - | - | - | - |
| 25 | 20.0 | - | - | - | - | - |
| 50 | 20.0 | - | - | - | - | - |
| 75 | 30.0 | - | - | - | - | - |
| 100 | 40.0 | - | - | - | - | - |
| 125 | 20.0 | - | - | - | - | - |
| 150 | 20.0 | - | - | - | - | - |
| SF | - | - | - | - | - | - |

| | Torque, Lb-Ft | % Full Load Torque | Speed, RPM | Current Amps. |
|---------------------|---------------|--------------------|------------|---------------|
| Locked Rotor Torque | - | - | - | - |
| Pull Up Torque | - | - | - | - |
| Breakdown Torque | - | - | - | - |
| Full Load | - | 100.0 | 1185.0 | - |

Speed Torque Curve

Please contact Techtop for image.

Dimensional Drawing

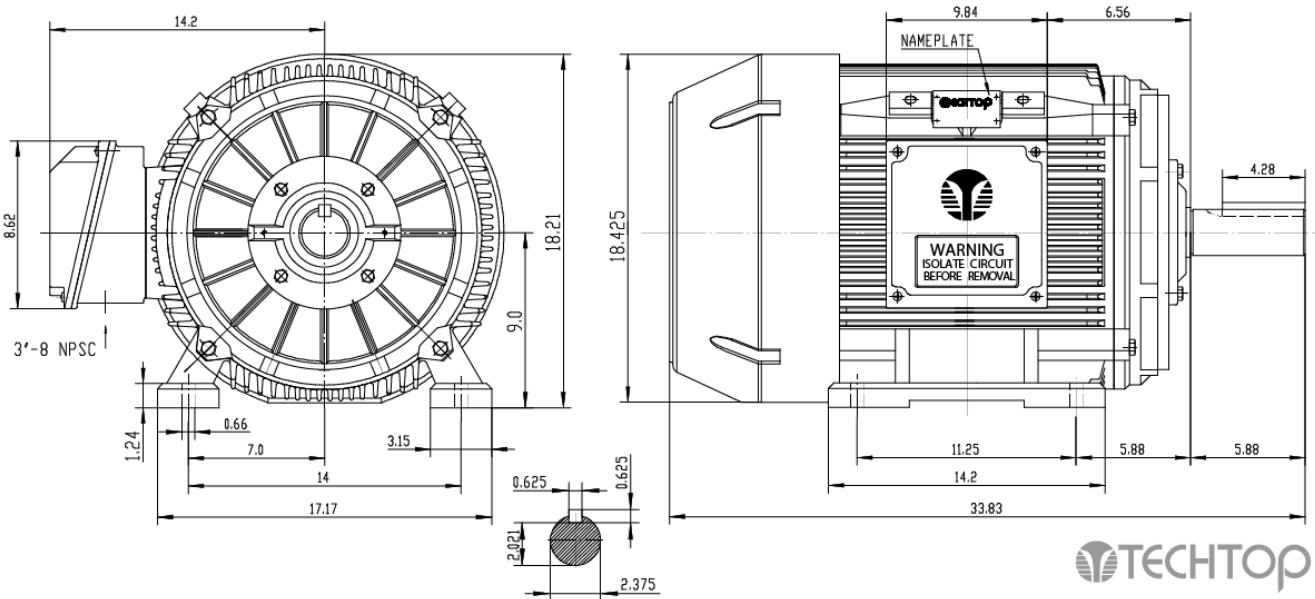

Dimensions are for reference only. Allowance should be made for minor deviations in non standard specified properties.

3D Image Link: Not available for this motor