



Pump Motors


NEMA

MOTOR MODEL:	GR3-CI-TF-365JM-4-BR-D-75
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 75.0HP, 1775 RPM

Torque Speed (T-n) Curve

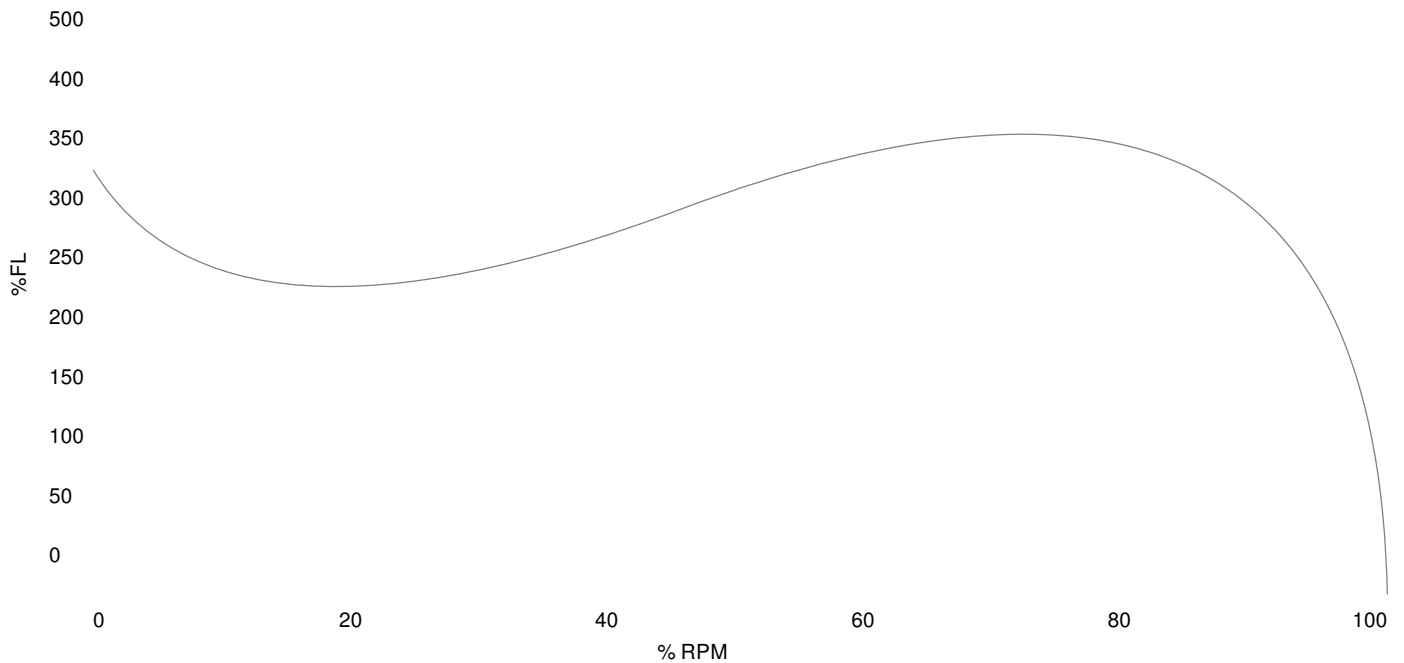

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	734.712	328.0	Start Configuration
Pull-Up Torque	369.596	165.0	Starting Current (A)
Breakdown Torque	665.273	297.0	No-Load Current (A)
Full Load	223.998	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	27.82	-	-	-	-
25	18.75	32.3	15.16	1795.3	92.0	0.59
50	37.5	47.4	29.4	1790.9	94.91	0.78
75	56.25	64.34	43.82	1786.2	95.51	0.85
100	75.0	82.84	58.45	1781.2	95.47	0.89
125	93.75	102.61	73.31	1775.9	95.15	0.9

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com