






NEMA Premium

<b>MOTOR MODEL:</b>	GR3-CI-TF-404T-6-RR-D-60
<b>FACTORY TYPE:</b>	TXC

**NEMA**

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

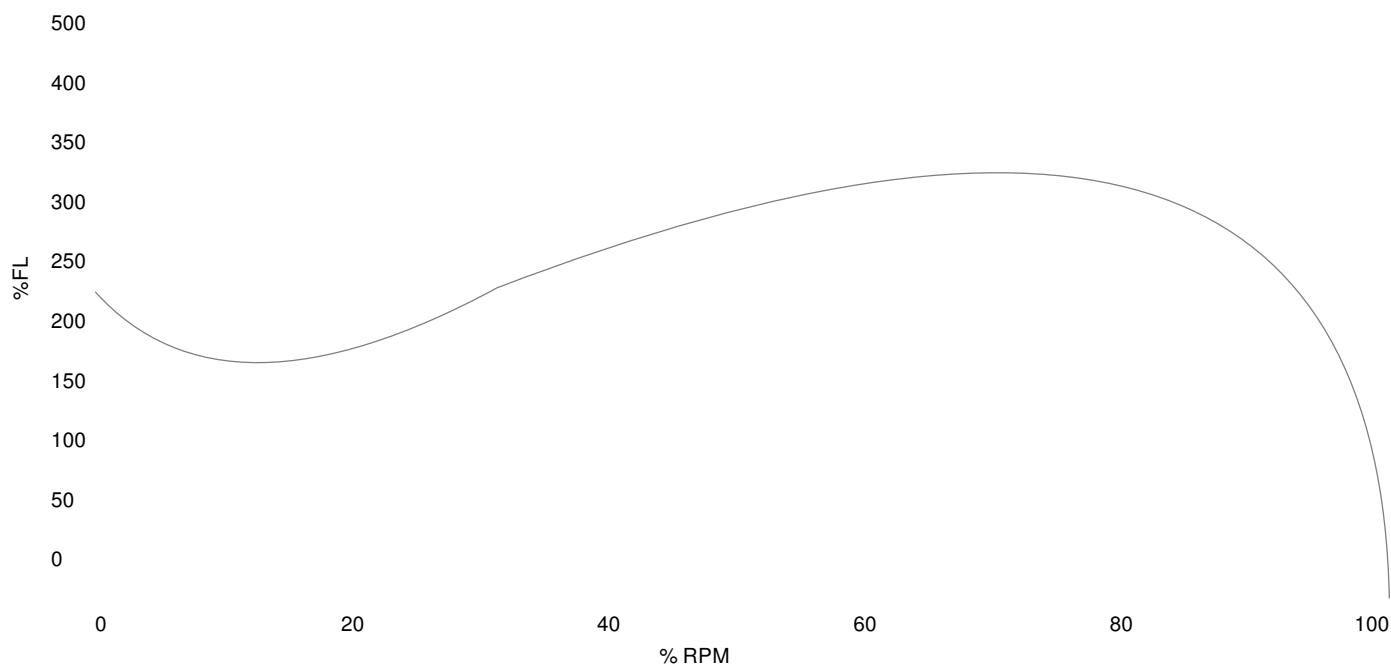

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	636.28	237.0	Start Configuration	-
Pull-Up Torque	338.276	126.0	Starting Current (A)	-
Breakdown Torque	644.334	240.0	No-Load Current (A)	-
Full Load	268.473	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	24.92	-	-	-	-
25	15.0	29.93	12.66	1196.9	88.86	0.53
50	30.0	40.96	24.18	1193.9	93.05	0.74
75	45.0	54.47	35.88	1190.5	94.06	0.83
100	60.0	69.89	47.8	1186.9	94.14	0.86
125	75.0	79.81	55.06	1184.6	93.99	0.87

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com