



NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-405T-4-BR-D-100
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	100.0	100.0
Speed, RPM	1780	1480
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	230.93/115.47	270/135
Power Factor	0.86	-
Nominal Efficiency	95.4	93.4
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	K	E
FL Amps. @ 208 V	-	-
Locked Rotor Current	1130.03	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	94.75	0.76
75%	95.29	0.84
100%	95.15	0.87
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	70.0	-
3D Image Link		
GR3-CI-TF-405T-4-BR-D-100		

GENERAL DATA				
Frame Size	405T			
Frame Enclosure	TEFC			
Mounting	Rigid			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	A			
Frame Material	Cast Iron			
Ingress Protection	55			
Tropicalization	true			
Cable Entry	1-NPT 3"			
Feet Removable	-			
Double Drilled	true			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	1025.32			
MECHANICAL DATA				
DE Bearing	6316C3			
NDE Bearing	6314C3			
dB No-Load	-			
Rotor Wk ² , Lb-Ft ²	-			
Comp Ring (wavey washer)	DE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	976.789		332.0	
Pull-Up Torque	291.271		99.0	
Breakdown Torque	453.089		154.0	
Full Load Torque	294.214		100.0	
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com



NEMA Premium


MOTOR MODEL:	GR3-CI-TF-405T-4-BR-D-100
FACTORY TYPE:	TXC

NEMA

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 100.0HP, 1780 RPM

Torque Speed (T-n) Curve

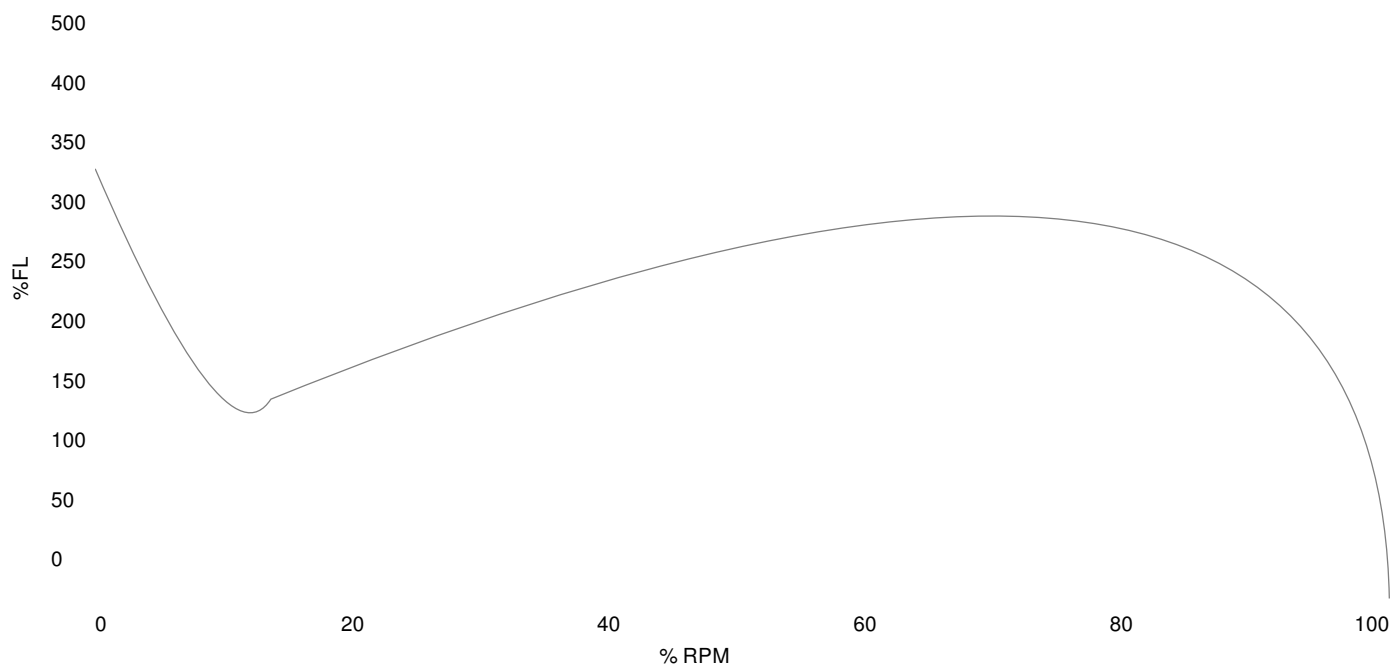

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	976.789	332.0	Start Configuration
Pull-Up Torque	291.271	99.0	Starting Current (A)
Breakdown Torque	453.089	154.0	No-Load Current (A)
Full Load	294.214	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	41.22	-	-	-	-
25	25.0	48.74	20.43	1796.0	91.8	0.53
50	50.0	65.67	39.58	1791.9	94.75	0.76
75	75.0	87.99	59.03	1787.6	95.29	0.84
100	100.0	113.85	78.83	1783.1	95.15	0.87
125	125.0	141.43	98.97	1778.3	94.72	0.88

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com