



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-405T-6-RR-F-75
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	75.0	75.0
Speed, RPM	1185	-
Voltage	575	-
# Phase	3	
Full Load Amps	69.12598919	-
Power Factor	0.86	-
Nominal Efficiency	94.5	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	H	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	647.032	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Load	Efficiency %	P.F.
50%	94.05	0.76
75%	94.57	0.84
100%	94.33	0.86
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	65.0	-
3D Image Link		
<a href="#">GR3-CI-TF-405T-6-RR-F-75</a>		

GENERAL DATA			
Frame Size	405T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 3"		
Feet Removable	-		
Double Drilled	true		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	1045.17		
MECHANICAL DATA			
DE Bearing	NU316		
NDE Bearing	6314C3		
dB No-Load	-		
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-		
Comp Ring (wavy washer)	None		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	715.421	220.0	
Pull-Up Torque	419.497	129.0	
Breakdown Torque	822.734	253.0	
Full Load Torque	325.191	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-405T-6-RR-F-75
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 75.0HP, 1185 RPM

Torque Speed (T-n) Curve

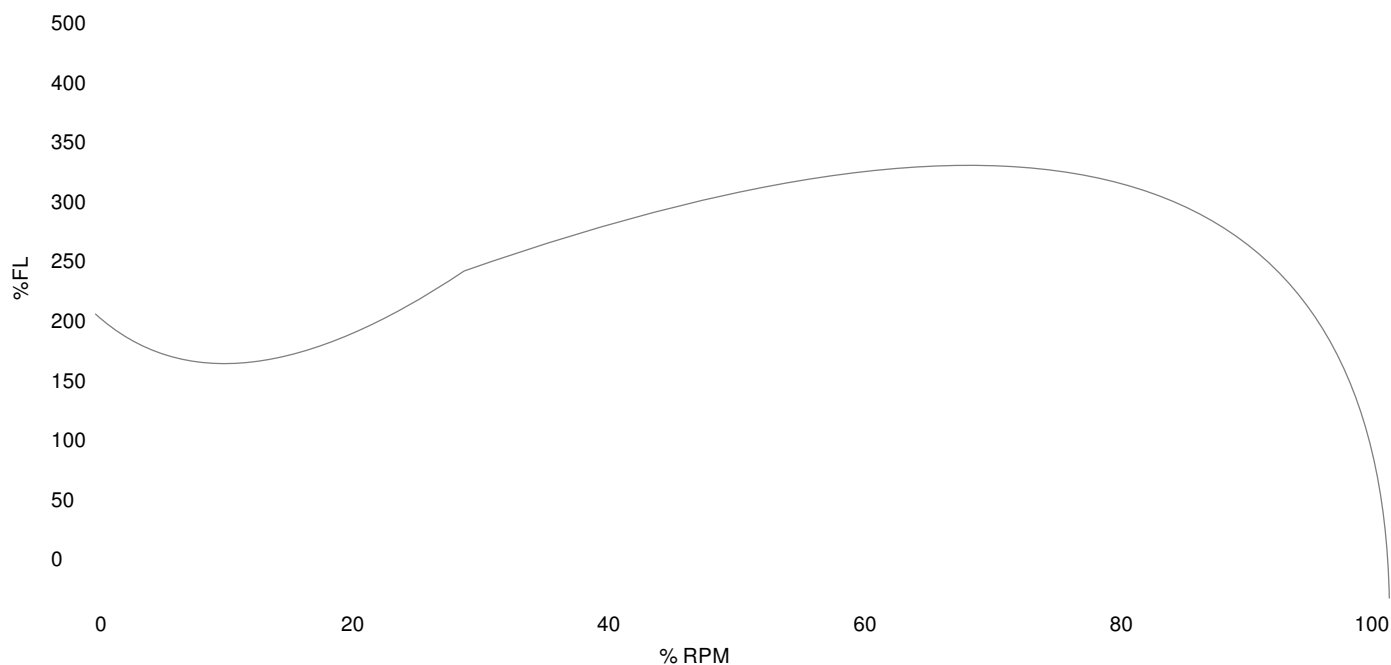

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	715.421	220.0	Start Configuration
Pull-Up Torque	419.497	129.0	Starting Current (A)
Breakdown Torque	822.734	253.0	No-Load Current (A)
Full Load	325.191	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	28.81	-	-	-	-
25	18.75	33.99	15.12	1197.0	90.93	0.56
50	37.5	48.23	29.24	1194.2	94.05	0.76
75	56.25	65.25	43.62	1191.1	94.57	0.84
100	75.0	84.69	58.31	1187.6	94.33	0.86
125	93.75	106.15	73.34	1183.7	93.74	0.87

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com