



NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-445T-6-RR-F-125
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	125.0	125.0
Speed, RPM	1180	-
Voltage	575	-
# Phase	3	
Full Load Amps	114.6036136	-
Power Factor	0.86	-
Nominal Efficiency	95.0	-
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	J	-
FL Amps. @ 208 V	-	-
Locked Rotor Current	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	93.12	0.73
75%	93.83	0.81
100%	93.68	0.85
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	100.0	-
3D Image Link		
GR3-CI-TF-445T-6-RR-F-125		

GENERAL DATA		
Frame Size	445	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 3"	
Feet Removable	-	
Double Drilled	true	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	1730.93	
MECHANICAL DATA		
DE Bearing	NU319	
NDE Bearing	6319C3	
dB No-Load	-	
Rotor Wk ² , Lb-Ft ²	-	
Comp Ring (wavy washer)	None	
TORQUE VALUES		
	Torque lb-ft	% FLT
Locked Rotor Torque	1694.37	269.0
Pull-Up Torque	894.427	142.0
Breakdown Torque	1933.73	307.0
Full Load Torque	629.878	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com



NEMA Premium


MOTOR MODEL:	GR3-CI-TF-445T-6-RR-F-125
FACTORY TYPE:	TXC

NEMA

Premium NEMA Cast Iron, TEFC

Non Sinusoidal (VFD) Output 125.0HP, 1180 RPM

Torque Speed (T-n) Curve

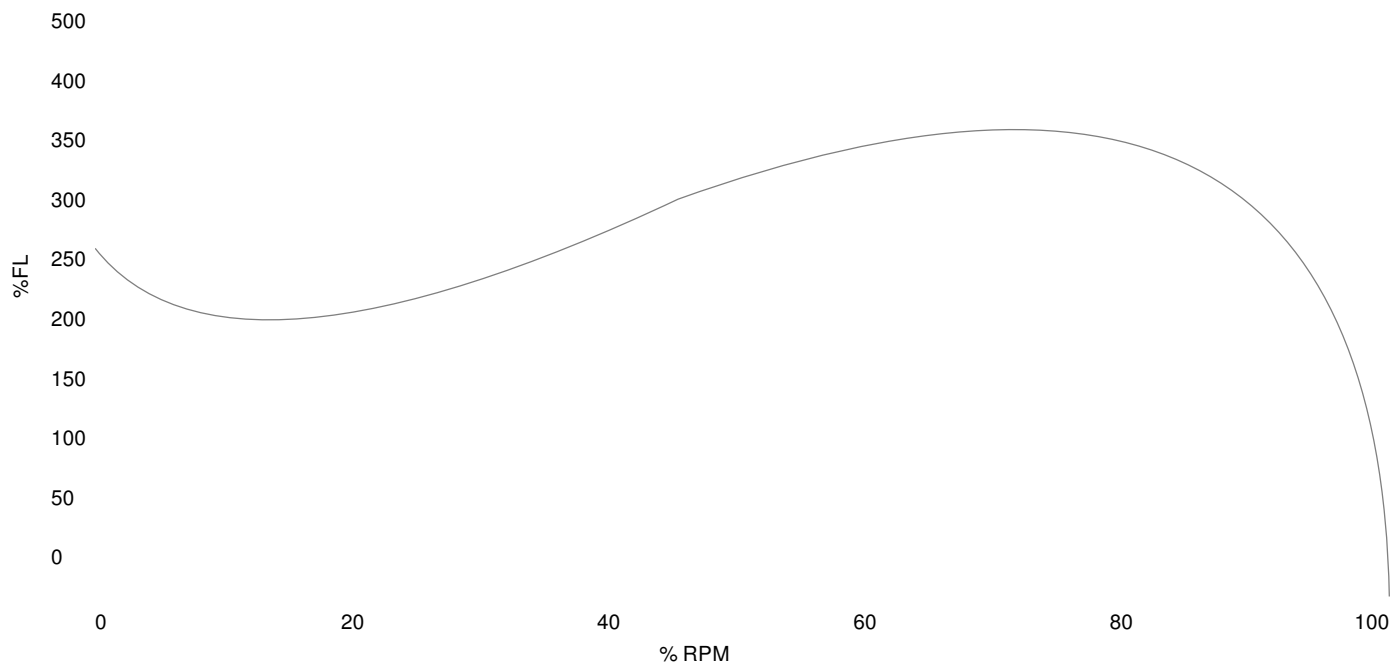

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	1694.37	269.0	Start Configuration
Pull-Up Torque	894.427	142.0	Starting Current (A)
Breakdown Torque	1933.73	307.0	No-Load Current (A)
Full Load	629.878	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	62.1	-	-	-	-
25	31.25	73.09	30.01	1197.8	89.39	0.52
50	62.5	99.61	57.61	1195.7	93.12	0.73
75	93.75	132.1	85.77	1193.4	93.83	0.81
100	125.0	169.49	114.54	1191.0	93.68	0.85
125	156.25	210.69	143.98	1188.3	93.16	0.86

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com