



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-447TC-4-BR-E-200
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	200.0	200.0
Speed, RPM	1780	1480
Voltage	460	380
# Phase	3	
Full Load Amps	218.7183825	269
Power Factor	0.89	-
Nominal Efficiency	96.2	94.0
3/4 Load Efficiency	-	-
Service Factor	1.15	1.0
KVA Code	H	D
FL Amps. @ 208 V	-	-
LRC @ 60Hz HV	2698.18	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	6	
Connection	D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	95.34	0.73
75%	95.83	0.83
100%	95.74	0.87
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	74.0	-
3D Image Link		
<a href="#">GR3-CI-TF-447TC-4-BR-E-200</a>		

GENERAL DATA		
Frame Size	447TC	
Frame Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	2-NPT 3"	
Feet Removable	-	
Double Drilled	true	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	2055.06	
MECHANICAL DATA		
DE Bearing	6319C3	
NDE Bearing	6319C3	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavy washer)	-	
TORQUE VALUES		% FLT
Locked Rotor Torque	2627.68	450.0
Pull-Up Torque	1775.14	304.0
Breakdown Torque	2277.32	390.0
Full Load Torque	583.928	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

\*This report valid for above Date Code and newer models, please contact Techttop for more info.




NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	GR3-CI-TF-447TC-4-BR-E-200
<b>FACTORY TYPE:</b>	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

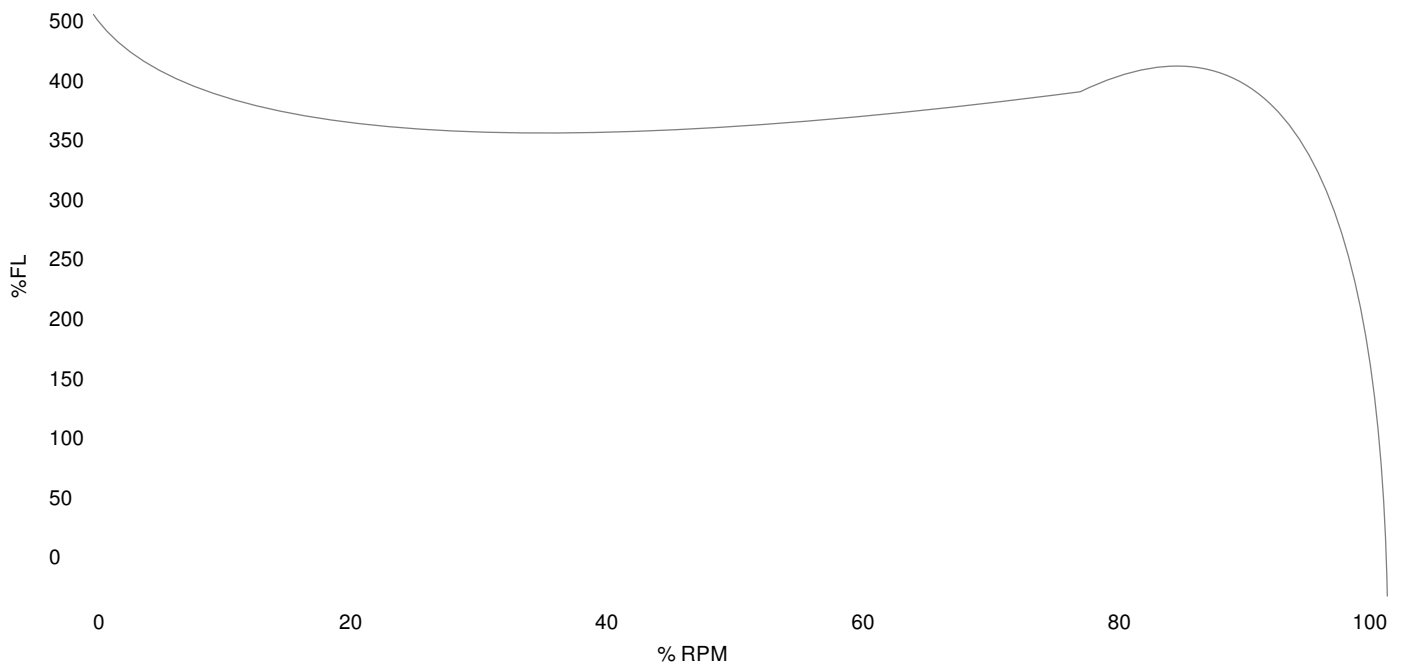

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	2627.68	450.0	Start Configuration	-
Pull-Up Torque	1775.14	304.0	Starting Current (A)	-
Breakdown Torque	2277.32	390.0	No-Load Current (A)	-
Full Load	583.928	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	84.68	-	-	-	-
25	50.0	100.46	40.44	1797.7	92.73	0.51
50	100.0	134.85	78.67	1795.5	95.34	0.73
75	150.0	177.4	117.4	1793.2	95.83	0.83
100	200.0	225.59	156.67	1790.9	95.74	0.87
125	250.0	256.15	180.49	1789.4	95.57	0.88

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com