



NEMA Premium

NEMA

MOTOR MODEL:	GR3-RS-OP-145T-4-B-D-1.5
FACTORY TYPE:	-

NEMA Rolled Steel, ODP

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	1.5	-
Speed, RPM	1740	1420
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	4.34/2.17	-
Power Factor	0.75	-
Nominal Efficiency	86.5	-
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	M	J
FL Amps. @ 208 V	4.43	-
Locked Rotor Current	-	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	3.74	
Date Code	-	
Load	Efficiency %	P.F.
50%	83.21	0.5463
75%	86.01	0.6798
100%	86.73	0.7612
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	31.0	40.0
3D Image Link		
GR3-RS-OP-145T-4-B-D-1.5		

GENERAL DATA				
Frame Size	145T			
Frame Enclosure	ODP			
Mounting	Rigid			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	-			
Frame Material	Rolled Steel			
Ingress Protection	23			
Tropicalization	true			
Cable Entry	1-NPT 3/4"			
Feet Removable	-			
Double Drilled	-			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	-			
MECHANICAL DATA				
DE Bearing	6205ZZ			
NDE Bearing	6203ZZ			
dB No-Load	-			
Rotor Wk ² , Lb-Ft ²	-			
Comp Ring (wavy washer)	NDE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	15.37	340.0		
Pull-Up Torque	13.11	290.0		
Breakdown Torque	19.66	435.0		
Full Load Torque	4.52	100.0		
SITE CONDITIONS				
Ambient Temp °C	-			
Altitude Above Sea Level m				

*This report valid for above Date Code and newer models, please contact Techtop for more info.



NEMA Premium


MOTOR MODEL:	GR3-RS-OP-145T-4-B-D-1.5
FACTORY TYPE:	-

NEMA

NEMA Rolled Steel, ODP

Non Sinusoidal (VFD) Output 1.5HP, 1740 RPM

Torque Speed (T-n) Curve

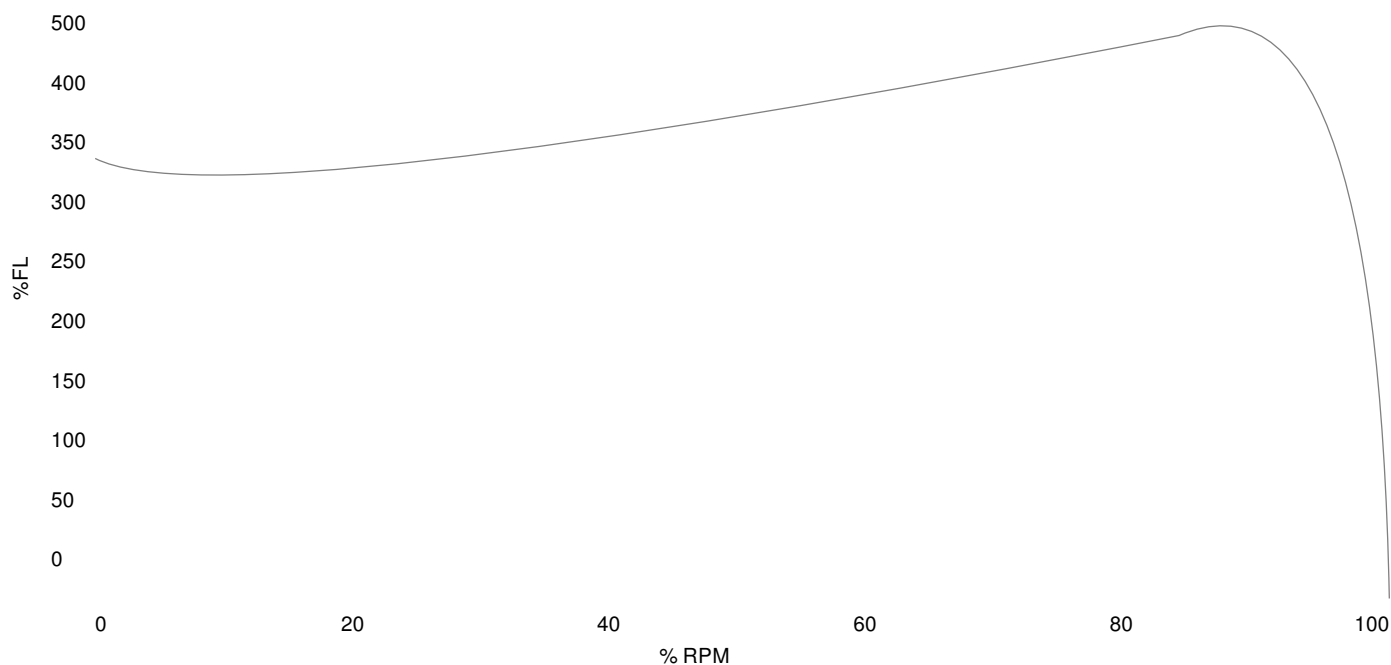

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	15.37	340.0	Start Configuration
Pull-Up Torque	13.11	290.0	Starting Current (A)
Breakdown Torque	19.66	435.0	No-Load Current (A)
Full Load	4.52	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	-	-	-	-	-	-
50	-	-	-	-	83.21	0.5463
75	-	-	-	-	86.01	0.6798
100	-	-	-	-	86.73	0.7612
125	-	-	-	-	-	-

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com