



NEMA Premium

MOTOR MODEL:	WX3-AL-TF-145T-2-B-D-2
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	2.0	2.0
Speed, RPM	3500	2880
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	5.18/2.59	6.16/3.08
Power Factor	0.85	-
Nominal Efficiency	85.5	83.8
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	H
FL Amps. @ 208 V	5.58	-
Locked Rotor Current	23.2974	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	84.53	0.67
75%	86.37	0.79
100%	86.27	0.85
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	39.7	39.0
3D Image Link		
WX3-AL-TF-145T-2-B-D-2		

GENERAL DATA			
Frame Size	145T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	B		
Frame Material	Cast Aluminum		
Ingress Protection	56		
Tropicalization	true		
Cable Entry	1-NPT 3/4"		
Feet Removable	true		
Double Drilled	-		
Paint Color	-		
Paint RAL	-		
Weight lb	29.5		
MECHANICAL DATA			
DE Bearing	6205ZZ		
NDE Bearing	6205ZZ		
dB No-Load	-		
Rotor Wk ² , Lb-Ft ²	-		
Comp Ring (wavey washer)	NDE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque	8.91226	294.0	
Pull-Up Torque	6.12339	202.0	
Breakdown Torque	10.0642	332.0	
Full Load Torque	3.03138	100.0	
SITE CONDITIONS			
Ambient Temp °C	40		
Altitude Above Sea Level m	1000		

*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com



NEMA Premium


NEMA

MOTOR MODEL:	WX3-AL-TF-145T-2-B-D-2
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC

Non Sinusoidal (VFD) Output 2.0HP, 3500 RPM

Torque Speed (T-n) Curve

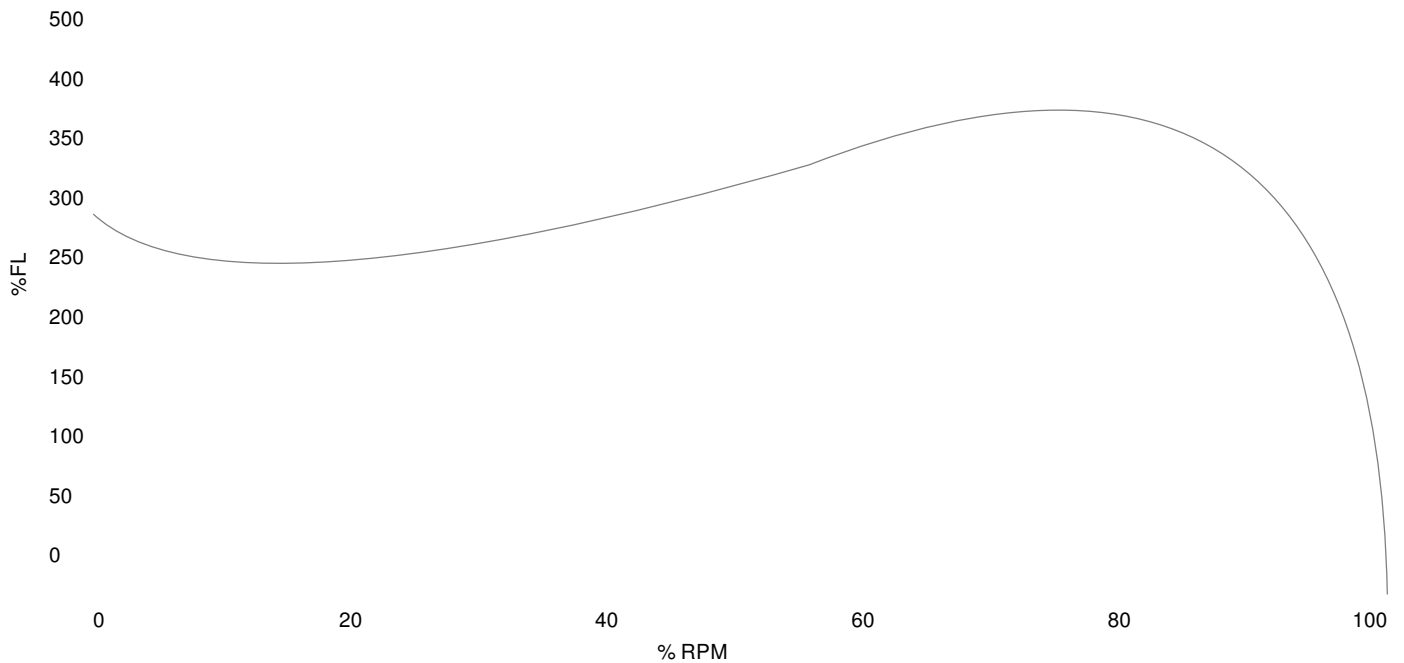

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	8.91226	294.0	Start Configuration
Pull-Up Torque	6.12339	202.0	Starting Current (A)
Breakdown Torque	10.0642	332.0	No-Load Current (A)
Full Load	3.03138	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	1.29	-	-	-	-
25	0.5	1.37	489.13	3575.5	76.67	0.45
50	1.0	1.67	887.26	3554.1	84.53	0.67
75	1.5	2.08	1302.5	3529.7	86.37	0.79
100	2.0	2.58	1738.8	3502.4	86.27	0.85
125	2.5	3.14	2199.9	3472.1	85.23	0.88

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com