




NEMA Premium

MOTOR MODEL:	WX3-AL-TF-215T-2-B-D-15
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

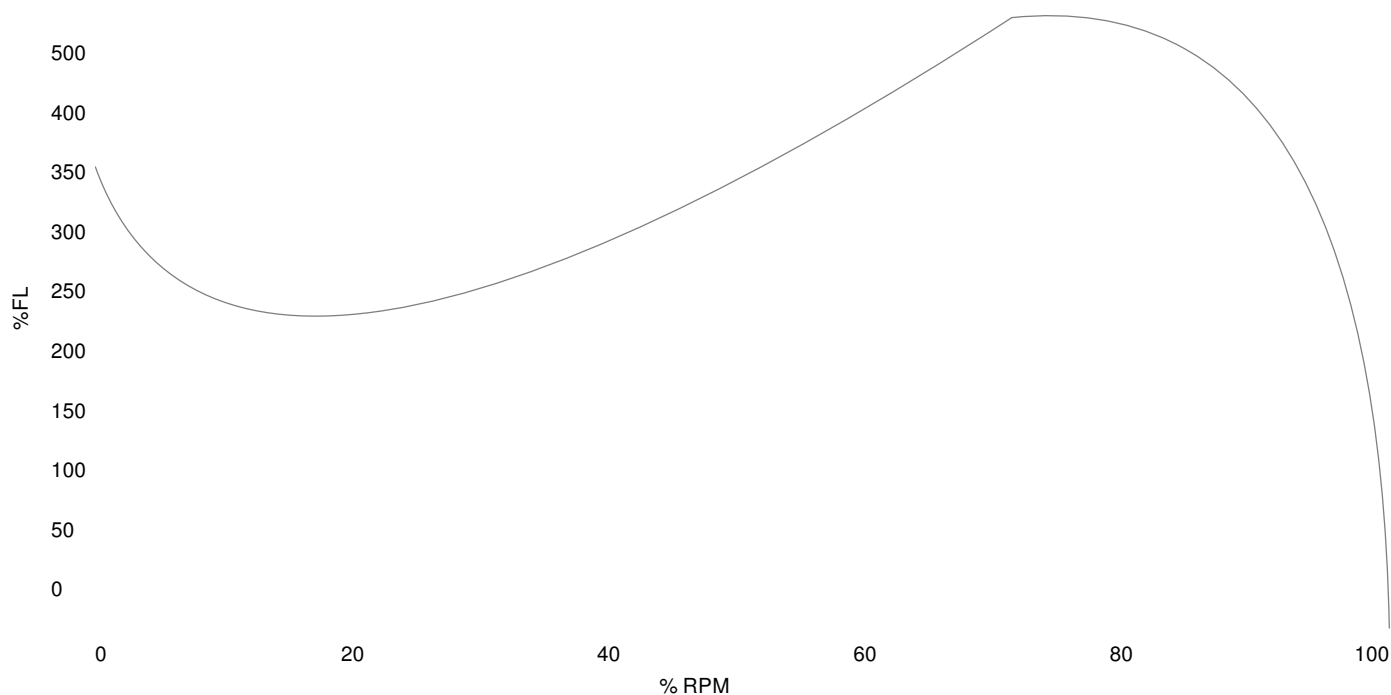

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	78.6506	357.0	Start Configuration	-
Pull-Up Torque	17.1842	78.0	Starting Current (A)	-
Breakdown Torque	103.986	472.0	No-Load Current (A)	-
Full Load	22.031	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	4.59	-	-	-	-
25	3.75	6.03	3.1084	3582.8	88.47	0.65
50	7.5	8.99	5.9639	3566.3	92.22	0.83
75	11.25	12.42	8.893	3548.7	92.77	0.9
100	15.0	16.22	11.907	3530.0	92.38	0.92
125	18.75	20.26	15.013	3510.1	91.59	0.93

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com