



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	WX3-AL-TF-56C-2-B-D-.75
<b>FACTORY TYPE:</b>	TXA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	0.75	0.75
Speed, RPM	3500	2870
Voltage	208-230/460	190/380
# Phase	3	
Full Load Amps	2.65-2.4/1.2	2.64/1.32
Power Factor	0.75	-
Nominal Efficiency	77.0	76.5
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	G
FL Amps. @ 208 V	2.65	-
LRC @ 60Hz HV	8.676	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	40.4	-
3D Image Link		
<a href="#">WX3-AL-TF-56C-2-B-D-.75</a>		

GENERAL DATA				
Frame Size	56C			
Frame Enclosure	TEFC			
Mounting	Rigid/C-Flange			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	B			
Frame Material	Cast Aluminum			
Ingress Protection	56			
Tropicalization	true			
Cable Entry	1-NPT 1/2"			
Feet Removable	true			
Double Drilled	-			
Paint Color	-			
Paint RAL	-			
Weight lb	17.1			
MECHANICAL DATA				
DE Bearing	6204ZZ			
NDE Bearing	6204ZZ			
dB No-Load	-			
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-			
Comp Ring (wavy washer)	NDE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque	3.60115	315.0		
Pull-Up Torque	2.77803	243.0		
Breakdown Torque	3.93268	344.0		
Full Load Torque	1.14322	100.0		
SITE CONDITIONS				
Ambient Temp °C	40			
Altitude Above Sea Level m	1000			

\*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: info@techttopind.com




NEMA Premium

<b>MOTOR MODEL:</b>	WX3-AL-TF-56C-2-B-D-.75
<b>FACTORY TYPE:</b>	TXA

**NEMA**

Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

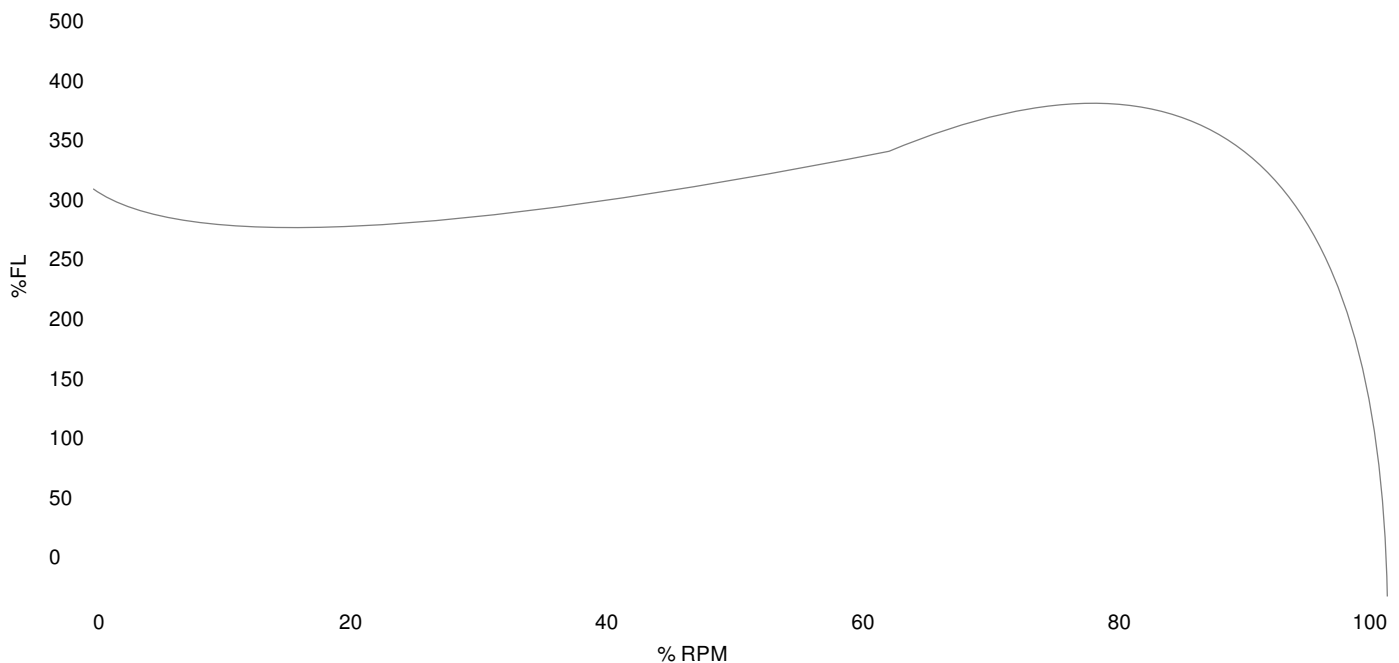

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	3.60115	315.0	Start Configuration
Pull-Up Torque	2.77803	243.0	Starting Current (A)
Breakdown Torque	3.93268	344.0	No-Load Current (A)
Full Load	1.14322	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	0.89	-	-	-	-
25	0.1875	-	-	-	-	-
50	0.375	-	-	-	-	-
75	0.5625	-	-	-	-	-
100	0.75	-	-	-	-	-
125	0.9375	-	-	-	-	-

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com