



NEMA Premium

**NEMA**

<b>MOTOR MODEL:</b>	WX3-AL-TF-56C-2-B-D-2
<b>FACTORY TYPE:</b>	TXA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	2.0	2.0
Speed, RPM	3500	2870
Voltage	208-230/460	190/380
# Phase	3	
Full Load Amps	5.5-5.24/2.62	6.20/3.10
Power Factor	0.84	-
Nominal Efficiency	85.5	83.5
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	L	H
FL Amps. @ 208 V	5.5	-
Locked Rotor Current	24.4068	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YY/Y	
Coil Resistance	-	
<b>Load</b>	<b>Efficiency %</b>	<b>P.F.</b>
50%	-	-
75%	-	-
100%	-	-
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	43.2	-
3D Image Link		
<a href="#">WX3-AL-TF-56C-2-B-D-2</a>		

GENERAL DATA		
Frame Size	56C	
Frame Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	B	
Frame Material	Cast Aluminum	
Ingress Protection	56	
Tropicalization	true	
Cable Entry	1-NPT 1/2"	
Feet Removable	true	
Double Drilled	-	
Paint Color	-	
Paint RAL	-	
Weight lb	26.5	
MECHANICAL DATA		
DE Bearing	6204ZZ	
NDE Bearing	6204ZZ	
dB No-Load	-	
Rotor Wk <sup>2</sup> , Lb-Ft <sup>2</sup>	-	
Comp Ring (wavy washer)	NDE	
TORQUE VALUES		
	<b>Torque lb-ft</b>	<b>% FLT</b>
Locked Rotor Torque	10.6747	353.0
Pull-Up Torque	8.92081	295.0
Breakdown Torque	12.8218	424.0
Full Load Torque	3.024	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com



NEMA Premium


**NEMA**

<b>MOTOR MODEL:</b>	WX3-AL-TF-56C-2-B-D-2
<b>FACTORY TYPE:</b>	TXA

Premium NEMA Cast Aluminum, TEFC

Non Sinusoidal (VFD) Output 2.0HP, 3500 RPM

Torque Speed (T-n) Curve

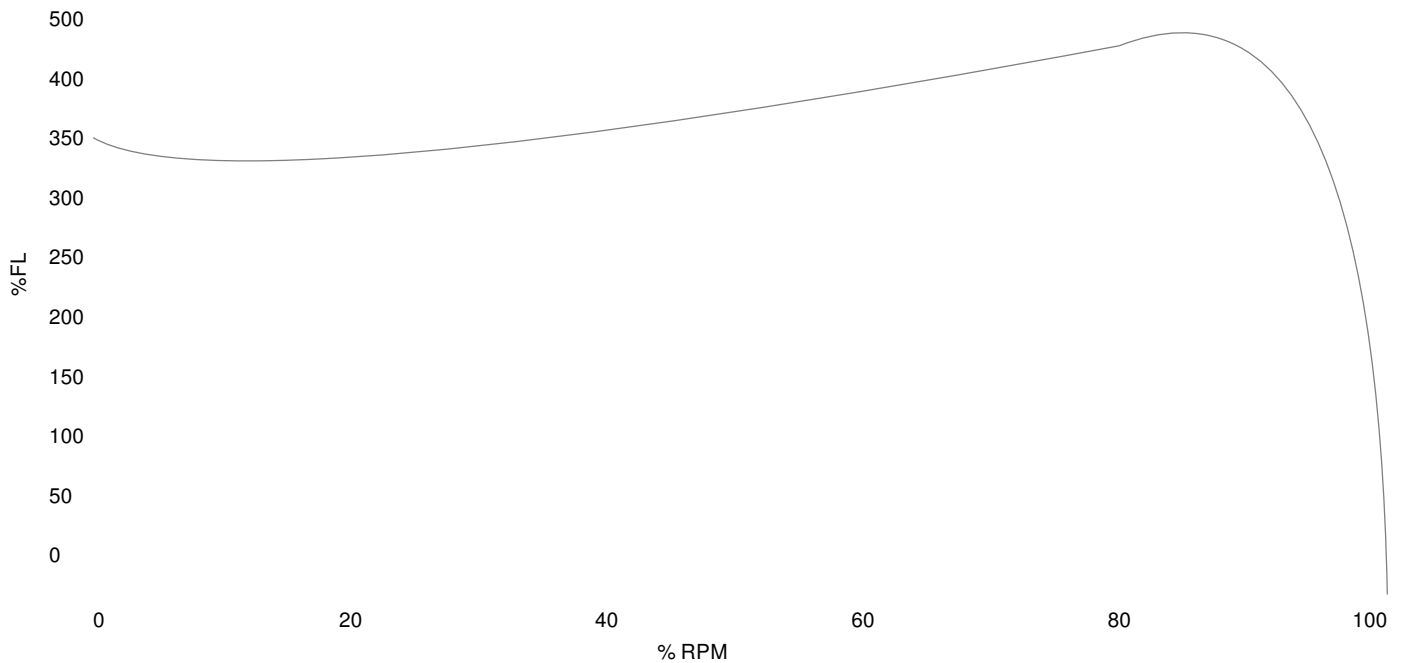

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	10.6747	353.0	Start Configuration
Pull-Up Torque	8.92081	295.0	Starting Current (A)
Breakdown Torque	12.8218	424.0	No-Load Current (A)
Full Load	3.024	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	1.3	-	-	-	-
25	0.5	-	-	-	-	-
50	1.0	-	-	-	-	-
75	1.5	-	-	-	-	-
100	2.0	-	-	-	-	-
125	2.5	-	-	-	-	-

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com