






Premium JM-JP

<b>MOTOR MODEL:</b>	GR3-AL-TF-56J-4-B-D-.33
<b>FACTORY TYPE:</b>	TXA

**NEMA**

Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

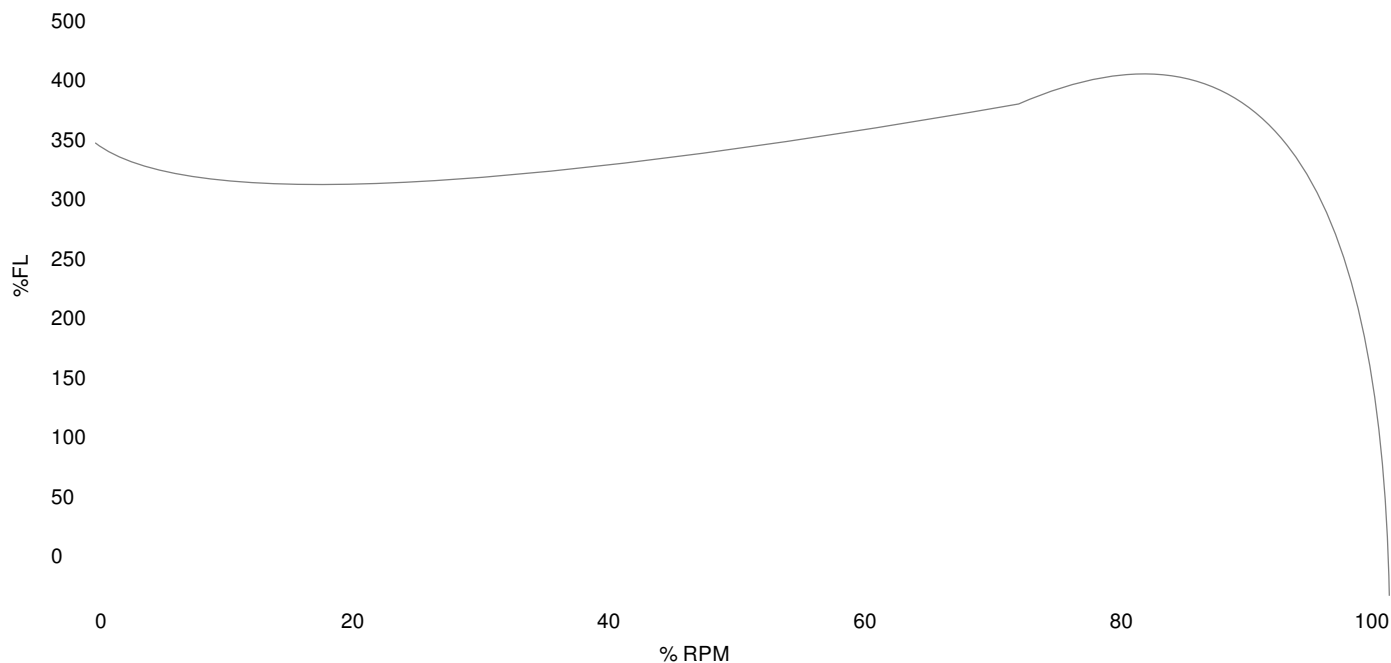

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	3.45917	350.0	Start Configuration
Pull-Up Torque	2.69815	273.0	Starting Current (A)
Breakdown Torque	3.75567	380.0	No-Load Current (A)
Full Load	0.988333	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	0.56	-	-	-	-
25	0.0825	-	-	-	-	-
50	0.165	-	-	-	-	-
75	0.2475	-	-	-	-	-
100	0.33	-	-	-	-	-
125	0.4125	-	-	-	-	-

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com



Premium JM-JP

**NEMA**

<b>MOTOR MODEL:</b>	GR3-AL-TF-56J-4-B-D-.33
<b>FACTORY TYPE:</b>	TXA

---

Premium NEMA Cast Aluminum, TEFC

---





Premium JM-JP

**NEMA**

<b>MOTOR MODEL:</b>	GR3-AL-TF-56J-4-B-D-.33
<b>FACTORY TYPE:</b>	TXA

---

Premium NEMA Cast Aluminum, TEFC

---



Techtop Industries  
2815 Colonnades Court  
Peachtree Corners, GA 30071  
Tel: 678-436-5540  
E-Mail: [info@techttopind.com](mailto:info@techttopind.com)

