


HP: 1/3–10
Pole: 4

Frame: 56–215T
Volt: 115/208–230 (<145T)
208–230 (>182T)

RPM: 1800 (60 Hz)
Body: T/TC/RND



56-145T

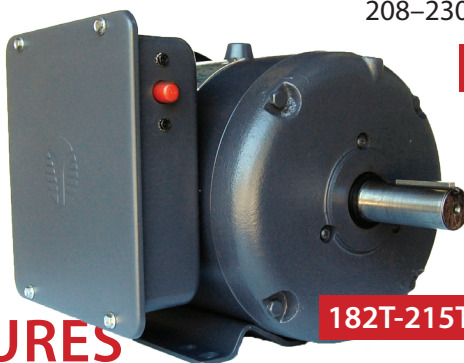

182T-215T

AUGER (56Y)



STANDARD FEATURES

- Manual Reset Protectors
- High Efficiency Dual Cap Design
- High Quality Molded Gaskets
- Over 300% Starting Torque
- Cast Iron End Bells
- Dual Oversized Ball Bearings
- Dependable Mechanical Starting Switch
- 18 Month Warranty




HP	Sync Speed	Model Number Rigid Base	List Price	Model Number C-Face with Base	List Price	Model Number C-Face with Round Body	List Price
1/3	1800	RD1-RS-TF-56-4-B-C-.33	\$285	RD1-RS-TF-56C-4-B-C-.33	\$299	RD1-RS-TF-56C-4-B-C-.33-RND	\$292
1/2	1800	RD1-RS-TF-56-4-B-C-.5	\$315	RD1-RS-TF-56C-4-B-C-.5	\$330	RD1-RS-TF-56C-4-B-C-.5-RND	\$320
3/4	1800	RD1-RS-TF-56-4-B-C-.75	\$348	RD1-RS-TF-56C-4-B-C-.75	\$360	RD1-RS-TF-56C-4-B-C-.75-RND	\$358
1	1800	RD1-RS-TF-56H-4-B-C-1	\$436	RD1-RS-TF-56HC-4-B-C-1	\$461	RD1-RS-TF-56C-4-B-C-1-RND	\$454
	1800	RD1-RS-TF-143T-4-B-C-1	\$448	RD1-RS-TF-143TC-4-B-C-1	\$463	RD1-RS-TF-143TC-4-B-C-1-RND	N/A
1.5	1800	RD1-RS-TF-56H-4-B-C-1.5	\$479	RD1-RS-TF-56HC-4-B-C-1.5	\$507	RD1-RS-TF-56C-4-B-C-1.5-RND	\$483
	1800	RD1-RS-TF-145T-4-B-C-1.5	\$489	RD1-RS-TF-145TC-4-B-C-1.5	\$515	RD1-RS-TF-145TC-4-B-C-1.5-RND	N/A
2	1800	RD1-RS-TF-56H-4-B-C-2	\$534	RD1-RS-TF-56HC-4-B-C-2	\$590	RD1-RS-TF-56C-4-B-C-2-RND	\$542
	1800	RD1-RS-TF-145T-4-B-C-2	\$543	RD1-RS-TF-145TC-4-B-C-2	\$599	RD1-RS-TF-145TC-4-B-C-2-RND	N/A
3	1800	RD1-RS-TF-182T-4-B-B-3	\$796	RD1-RS-TF-182TC-4-B-B-3	\$834	RD1-RS-TF-182TC-4-B-B-3-RND	N/A
5	1800	RD1-RS-TF-184T-4-B-B-5	\$958	RD1-RS-TF-184TC-4-B-B-5	\$973	RD1-RS-TF-184TC-4-B-B-5-RND	N/A
7.5	1800	RD1-RS-TF-213TZ-4-B-B-7.5	\$1,463	RD1-RS-TF-213TCZ-4-B-B-7.5	\$1,512	RD1-RS-TF-213TCZ-4-B-B-7.5-RND	N/A
10	1800	RD1-RS-TF-215T-4-B-B-10	\$1,743	RD1-RS-TF-215TC-4-B-B-10	\$1,789	RD1-RS-TF-215TC-4-B-B-10-RND	N/A

Multiplier Code: R1

AUGER MOTORS

HP	Sync RPM	Model Number	Price
1/2	1800	RX1-RS-TF-56Y-4-B-C-.5	\$348
3/4	1800	RX1-RS-TF-56Y-4-B-C-.75	\$392
1	1800	RX1-RS-TF-56Y-4-B-C-1	\$478








**Contact Techtop to
replace your unreliable
inefficient auger
gearboxes with high
efficiency Helical units**

Continued on back






RIGID

SHAFT

C - FACE



FRAME	AA	AB	AD	AK	BA	BB	C	D	E	2E	FL	2F	O	P	R	S	T	U	V	TAP	H2		
56 (1/3 HP)	0.88	3.7	2.65	----	2.25	----	10.7	3.5	2.44	4.88	4	3	5.67	8.3	0.517	0.188	7.7	0.625	1.88	----	----		
56C (1/3 HP)				4.5		0.16														3/8-16	5.875		
56				----		----														----	----		
56C				4.5		0.16														3/8-16	5.875		
143/145T		4.1	4	----		----	14.1		2.75	5.5	5.9	5	6.5	9.1	0.771		8.1	0.875	2.25	----	----		
143/145TC		4.5	0.16	3/8-16		5.875																	



FRAME	AA	AB	AD	AK	BA	BB	C	D	E	2E	FL	2F	J	O	P	R	S	T	U	V	TAP	H2
182T	1.13	5.5	4.5	----	2.75	----	16.95	4.5	3.75	7.5	6.5	5.5	9.45	9.1	11.65	0.986	0.25	1.75	1.125	2.75	----	----
182TC				8.5		0.25															1/2-13	7.25
184T				----		----	----														----	
184TC				8.5		0.25	1/2-13														7.25	
213TZ*		6.2	5.5	----	3.5	----	20	5.25	4.25	8.5	8.5	7	10.1	10.6	13.3	1.201	0.312	1.75	1.375	3.38	----	----
213TCZ*				8.5		0.25															1/2-13	7.25
215T				----		----	----														----	
215TC				8.5		0.25	21.5														1/2-13	7.25

* 213TZ MOTOR INCLUDES SHAFT ADAPTER TO 215T SHAFT SIZE





FRONT

REAR

SHAFT

SIDE

AUGER MOTORS

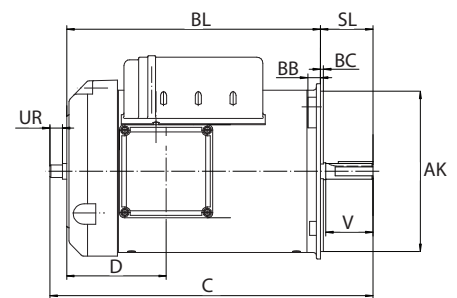

HP	AA	AK	BB	BC	BL	C	CW	D	FF	FD	F1	F2	M	SL	UR	V	Y	Z	TAP	PRICE
0.5	0.875	6.375	0.52	0.12	8.51	11.2	1.93	3.95	7.25	7.3	0.45	0.5	5.3	2.02	0.5	1.875	3.1	5.53	0.36	\$348
0.75					10.11	12.8							4.6							\$376
1.0					12.87	12.87							2.09							\$406